

Technical data sheet 1161610 | 1161609 | 1161611

3M[™] Protecta[®] Standard Vest Style Fall Arrest Harness with 2 Attachment Points

Part number(s): 1161610 Medium / Large (M/L) 1161609 Small (S) 1161611 Extra Large (XL)

Description

Sub-brand:	Protecta®
Industry:	Construction, general industry, mining, transportation, general manufacturing
Applications:	Fall arrest, vertical ladder climbing

Features

Rear fall arrest attachment point:	 Large D-ring Steel - zinc plated black electro-deposition paint 	
Front fall arrest attachment point:	 Standard D-ring Steel - zinc plated black electro-deposition paint 	
Buckles:	 Pass-through buckles Steel - zinc plated black electro-deposition paint 	
Adjustment:	 Torso, legs Torso: Spring adjuster Steel - zinc plated black electro-deposition paint 	
Webbing:	45 mm polyester - water & dirt resistant	
Thread:	Polyester	
Additional features:	 Compatible for use with Secumar Personal Flotation Device models (not included): SECUMAR® Golf 275 AS (Part Number 13805) Alpha 275 AS Solas (Part Number 14824-01) Front & rear fall indicators Auto-resetting lanyard keeper Hook and loop web ends Protected labels 	
Weight capacity:	140 kg	
Operating temperature:	-35°C +57°C	
Standards:	CE EN361:2002	



Compatible for use with Secumar Personal Flotation Device models:



Golf 275 AS (Part Number 13805)




Alpha 275 AS Solas (Part Number 14824-01) Front



Back

Version: 1

This version is the sole document applicable to the product(s) since its date of publication

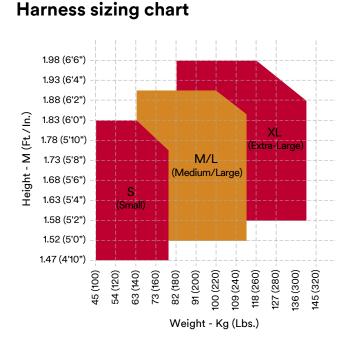

3M Protecta® Fall Arrest

Weight

	∢►	kg
1161609	Small (S)	1.11
1161610	Medium / Large (M/L)	1.16
1161611	X-Large (XL)	1.21

Important notice

The mounting and use of the product described within this document assumes that the user has previous experience of this type of product and that is will be assembled by a competent professional according to product documentation. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected application.

All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user.

Compliance to the information and specification relative to the product contained within this document does not exempt the user from compliance with additional guidelines (safety rules, procedures). Compliance to operational requirements especially in respect to the environment and usage of tools with this product must be observed. The 3M Group (who cannot verify or control these elements) would not be held responsible for the consequences of any violation of these rules which remain external to its decision and control.

Warranty conditions for products are determined with the sales contract documents and with the mandatory and applicable law, excluding any other warranty or compensation.

