

# BUCK LEVERJUST™

## LIGHTWEIGHT ADJUSTABLE POSITIONING LANYARD

### Aluminum Snap Hook

ANSI rated hardware reduces overall weight

### ½" Kernmantle Rope

With a red wear indicator to alert user of excessive wear, ½" rope makes the LeverJust™ especially appealing to arborists.

### New Buck LeverGrab™


Designed specifically to allow users to lengthen without removing weight from the lanyard.

### Buck LeverJust™ 9M8-8

The Buck LeverJust™ is a light weight Adjustable Positioning Lanyard (APL) which features Buckingham's all new LeverGrab™ Length Adjusting Device (LAD) with aluminum hardware. The new Buckingham LeverGrab™ LAD allows for easy one-handed adjustment of your APL. Meets all applicable ANSI, OSHA, and ASTM standards.

Key features include:

- ½" Kernmantle rope with a red wear indicator to alert the user of excessive wear
- The New Buck LeverGrab™ LAD easily adjusts with one hand and is fully adjustable while under load, making length adjustment easier
- This versatile lanyard can be used for positioning, suspension or rescue
- For use by right or left handed users
- A stitched eye on the tail of the rope allows the user to easily stow the excess tail on either the BuckTender (PN 2404) or Handline Carrier (PN 2402G)
- The ANSI Z359.12 3600 lbf. rated gate aluminum hardware reduces the overall weight
- Maximum user weight of 350 lbs. when fully equipped
- Meets applicable OSHA regulations, ASTM F887, and ANSI standards.

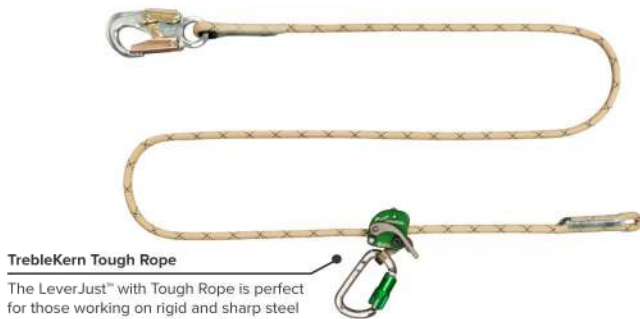

### TrebleKern Tough Rope

The LeverJust™ with Tough Rope is perfect for those working on rigid and sharp steel structures (like a substation or tower) where wear and sharp edges are an issue.

### Buck LeverJust™ 92CM8-8

Upgrade to the LeverJust™ with Buck's new wear-resistant 11.65 MM. TrebleKern Tough Rope, which is nearly indestructible. Buckingham's new wear-resistant Tough Rope is constructed with an energy absorbing nylon core, red braided polyester inner core cover (red wear indicator) and an abrasion and heat resistant Technora outer jacket that eliminates the need for a wear guard. No more jamming of your wear guard! Meets all applicable ANSI, OSHA, and ASTM standards.

Both models available in sizes: 6', 7', 8', 9', and 10'. Please contact Buckingham for additional sizes or styles.

