

TEMPORARY LIFELINE

Horizontal temporary lifeline constructed from strong and durable polyester webbing.

Certified for use with a maximum of two people.

Equipped with steel tensioning ratchet, two polyamide anchor loops (ref.104065), and two locking steel connectors (ref.0981E).

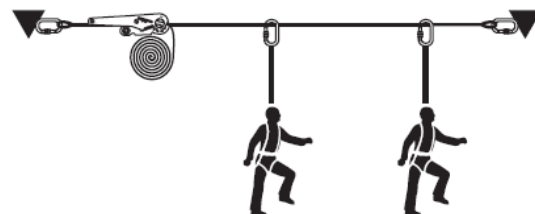
ROOFS CONSTRUCTION PYLONS/INDUSTRY

Ref.1095 - 18 meters
Ref.109501 - 30 meters

Supplied with:










Ref.109501 - 30 m



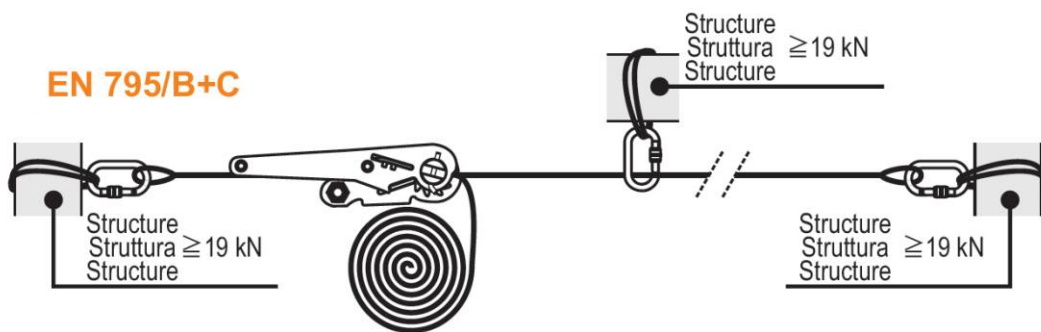
Ref.	Product name Nombre del producto	Weight Peso		CE EN 795/B+C	STANDARD		EN •
		g	oz		EN 795/C	TS 16415	
1095	TEMPORARY LIFELINE 5-18 m	3000	105.9	•	•	•	•
109501	TEMPORARY LIFELINE 5-30 m	3500	123.5	•	•	•	•

A						
REF.		L min	L max	L max	L, min	L, max
1095 Temporary Lifeline 18 m	EN 795 B+C 	5 m	18 m	18 m	5 m	18 m
	EN 795 C 	12 m	18 m	18 m	5 m	18 m
109501 Temporary Lifeline 30 m	EN 795 B+C 	5 m	18 m	30 m	5 m	18 m
	EN 795 C 	12 m	18 m	30 m	5 m	18 m

B	f (flessione / bending)		F _{max} (MAX FORCE ON THE ANCHOR)
	EN 795/B+C 	EN 795/C 	
	65 cm	-	13 kN
	70 cm	-	14 kN
	150 cm	145 cm	12 kN
	165 cm	160 cm	13 kN
	225 cm	220 cm	10 kN
	240 cm	235 cm	11 kN
	115 cm	110 cm	7 kN
	125 cm	120 cm	8 kN
	260 cm	250 cm	9 kN
	275 cm	265 cm	11 kN

INSTALLATION:

EN 795/B+C



EN 795/C

