

## TEMPORARY LIFELINE

Horizontal temporary lifeline constructed from strong and durable polyester webbing.

Certified for use with a maximum of two people.

Equipped with steel tensioning ratchet, two polyamide anchor loops (ref.104065), and two locking steel connectors (ref.0981E).


ROOFS CONSTRUCTION PYLONS/INDUSTRY

Ref.1095 - 18 meters  
Ref.109501 - 30 meters


Supplied with:








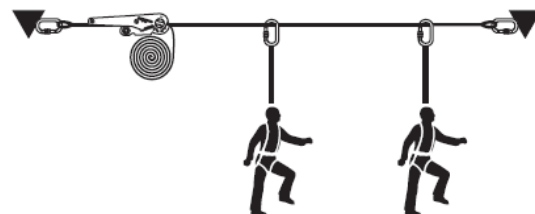

**Ref.109501 - 30 m**




Ref.	Product name Nombre del producto	Weight Peso		CE	STANDARD		EN
		g	oz		EN 795/C	TS 16415	
1095	TEMPORARY LIFELINE 5-18 m	3000	105.9	•	•	•	•
109501	TEMPORARY LIFELINE 5-30 m	3500	123.5	•	•	•	•

<b>A</b>						
REF.		L min	L max	L max	L, min	L, max
<b>1095</b> Temporary Lifeline 18 m	EN 795 B+C 	5 m	18 m	18 m	5 m	18 m
	EN 795 C 	12 m	18 m	18 m	5 m	18 m
<b>109501</b> Temporary Lifeline 30 m	EN 795 B+C 	5 m	18 m	30 m	5 m	18 m
	EN 795 C 	12 m	18 m	30 m	5 m	18 m

<b>B</b>	f (flessione / bending)		F <sub>max</sub> (MAX FORCE ON THE ANCHOR)
	EN 795/B+C 	EN 795/C 	
	65 cm	-	13 kN
	70 cm	-	14 kN
	150 cm	145 cm	12 kN
	165 cm	160 cm	13 kN
	225 cm	220 cm	10 kN
	240 cm	235 cm	11 kN
	115 cm	110 cm	7 kN
	125 cm	120 cm	8 kN
	260 cm	250 cm	9 kN
	275 cm	265 cm	11 kN

## INSTALLATION:

### EN 795/B+C

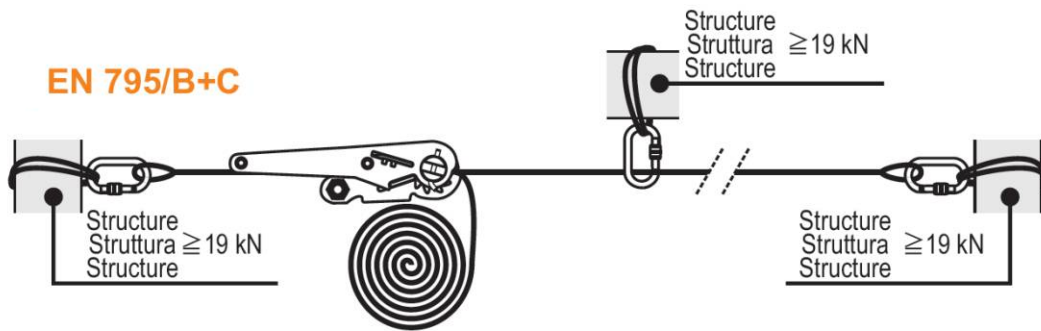

### EN 795/C

