

## 1175 LIFT

Compact rope clamp with a toothless cam for gentle action on the rope.


Flanges and cam constructed from aluminum alloy.

Standards:

- EN 12841/B for semi-static ropes ranging from 10 to 13 mm.
- EN 567 for semi-static and dynamic ropes ranging from 8 to 13 mm.

2017 UPDATE: red color.

ROPE ACCESS    TREE CLIMBING    TEAM RESCUE

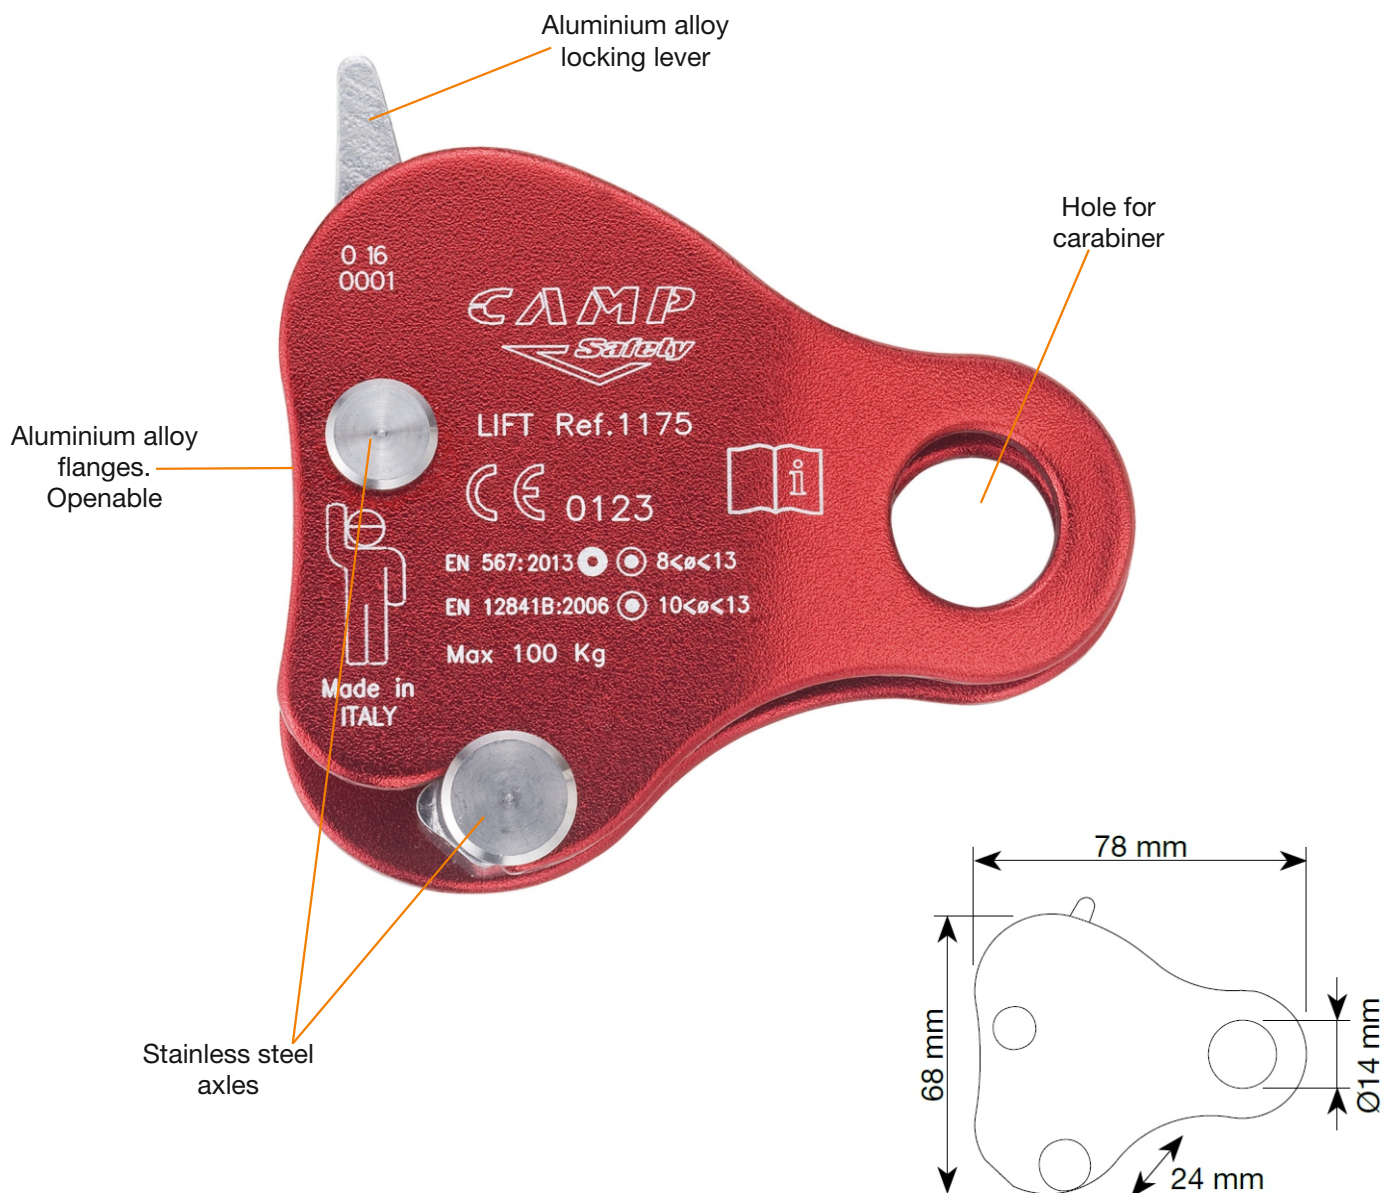

Ref.	Product name Nombre del producto	Weight Peso		Rope diameter Diámetro de cuerda		CE	
		g	oz	Min - mm	Max - mm	EN 12841/B	EN 567
1175	LIFT	95	3.4	8	13	•	•