

1388 I-BLOCK EVO

Auto-braking single rope descender with two locking positions. Descent speed can be controlled up to 2 m/s. Maximum working load: 160 kg (200 kg for rescue scenarios).

Standards:

- **EN 12841/C** as a descender of the working line for semi-static ropes ranging from 9 to 12 mm.
- **EN 341/2A** as an emergency evacuation device on a single line, 11 mm semi-static rope (certified with rope Teufelberger Patron 11 mm, compatible with rope Iridium 11 mm).

CE **EN 12841/C - EN 341***

ROPE ACCESS


TREE CLIMBING

SELF RESCUE




430

TECHNICAL SHEET



- A:** self-braking
B: descend
C: press-braking

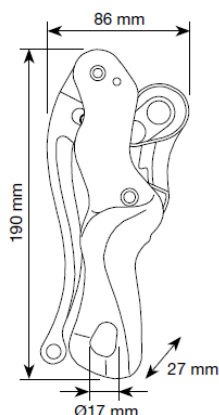

I-BLOCK EVO BLACK
Ref.138803

