


1883 TRIPOD EVO

TECHNICAL SHEET

Tripod anchor system with adjustable legs.
 Height is adjustable from 147 to 229 cm.
 Four connection points at the top for maximum versatility.
 Maximum working load: 500 kg.
 Breaking strength: 22 kN.
 Safe operating diameter: min 140 cm, max 213 cm.
 Packed size: 23x23x172 cm.
 2017 UPDATE: supplied with a PVC carrying bag.

CONFINED

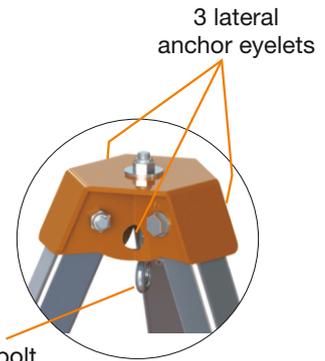


Galvanized and painted steel head with four attachment points


CE label with batch and serial number

Telescopic aluminium alloy legs.
 Outer profile: 45.5 x 45.5 x 3 mm
 Inner profile: 38.5 x 38.5 x 4 mm


Rotating feet



Rotating feet with rubber sole

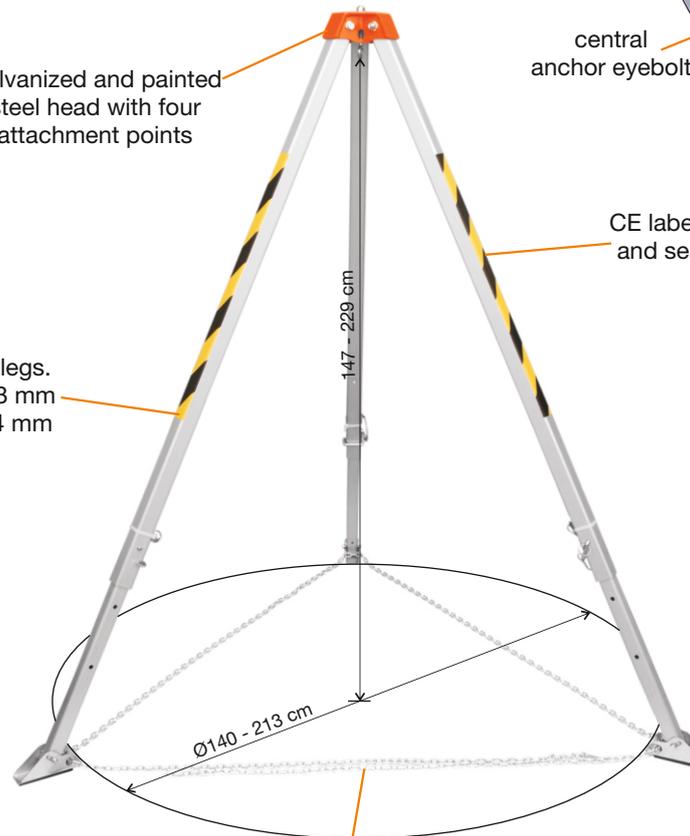

Steel chain for legs connection

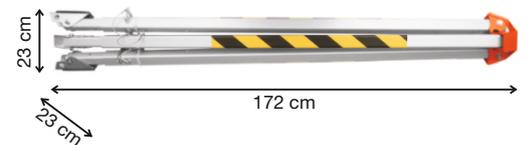

Rescue device **ref.0284 or 028401** may be easily installed (Cable length: 20 m or 25 m). Working load limit: 140 kg. Supplied separately together with pulley and connectors.

CARRYING BAG



Ref.	Product name Nombre del producto	Weight Peso			CE EN 795/B	EAC
		kg	lb	oz		
1883	TRIPOD EVO	17	37	8		