




## Ref.2099 COBRA 32

Self-retracting fall arrester with a cable length of 32 m.  
 Also certified for horizontal/incline use if used in combination with an energy absorbing lanyard (ref. 5030101).  
 4 mm galvanized steel cable with a breaking strength of 12 kN is protected by a durable ABS cover.  
 Complete with auto-locking swivel connector and internal mechanical energy absorbing system.

CONFINED
ROOFS
CONSTRUCTION
TOWERS/INDUSTRY



EDGE TESTED

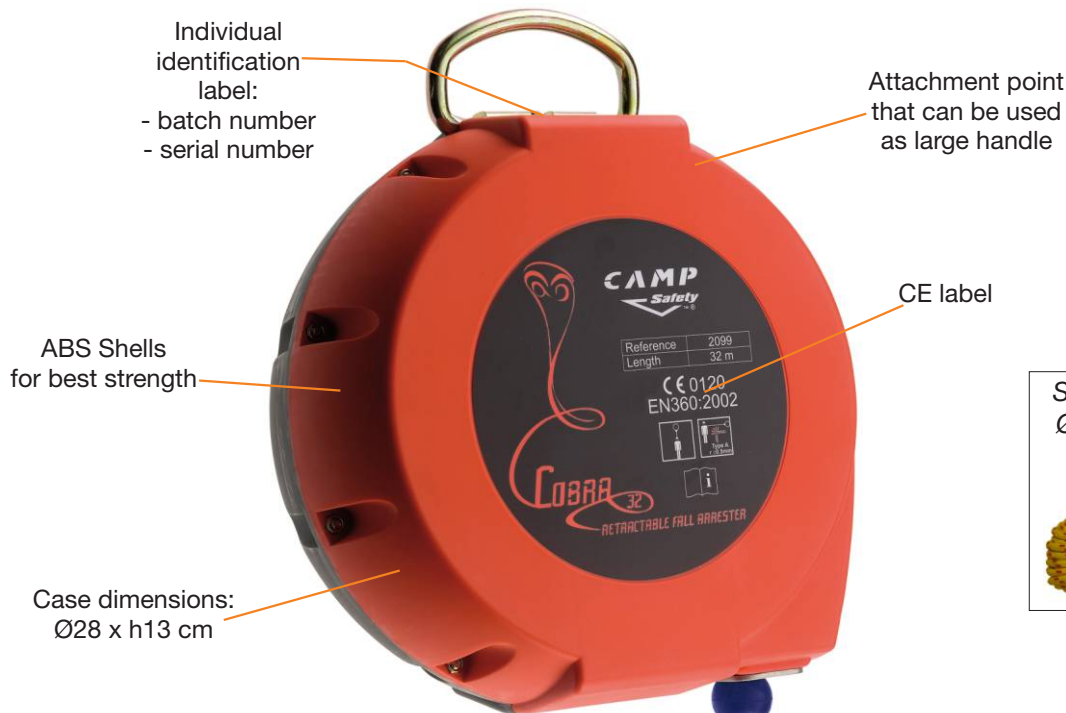

Individual identification label:  
 - batch number  
 - serial number

Attachment point that can be used as large handle

CE label

ABS Shells for best strength

Case dimensions: Ø28 x h13 cm



Supplied with guiding cord Ø5 x 20 m, useful to guide the cable back into the retractor.



Galvanized cable  
 Ø4 mm  
 Strength >12 kN  
 Length 32 m

Fall indicator integrated on the connector

Double action safety connector with swivel ref.0925  
 Strength >23 kN  
 Opening 20 mm  
 Zinc Plated

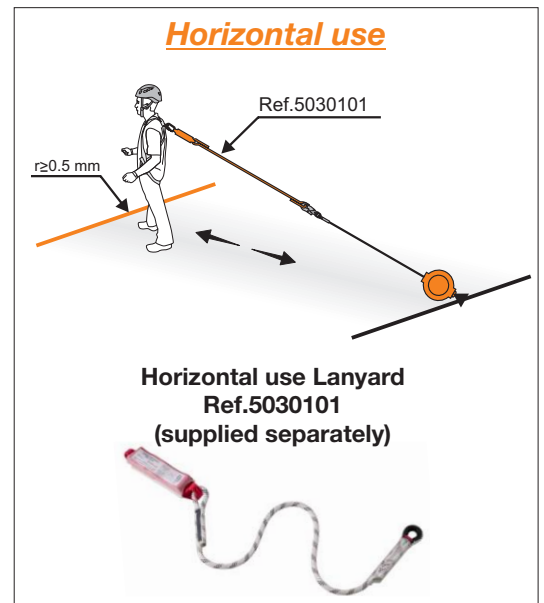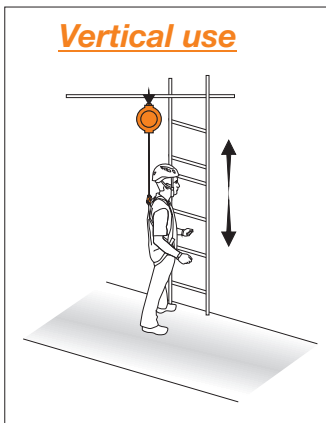

Ref.	Product name Nombre del producto	Weight Peso			CE		EAC
		kg	lb	oz			
2099	COBRA 32 m	12.5	27	9	EN 360	CNB/P/11.060	