

2152 - SPHINX

TECHNICAL SHEET

An ultra slim, highly functional pulley.


The attachment hole allows full rotation of the carabiner. For ropes up to 13 mm. Prusik minding, the self-locking knot can be installed on one side. Self-lubricated bushings are perfect for light applications at low speed.

Efficiency: 80%.

Aluminum alloy body and wheel, stainless steel axle.

CE EN 12278

GENERAL	SELF RESCUE
 95	MBL 24 kN WLL 4 kN  WLL 2 kN WLL 2 kN

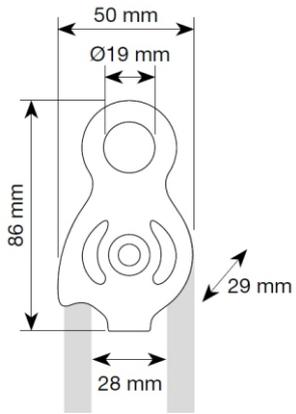

Hole allows full rotation of the carabiner

Self-lubricated bushings

Prusik minding, the self-locking knot can be installed on one side

SPHINX BLACK
215203
BLACK LINE

