

5030101 SHOCK ABSORBER ROPE LANYARDS

TECHNICAL SHEET

Lanyards constructed from 10.5 mm polyamide static rope. Kernmantle rope structure with internal core and woven sheath offers optimal durability.

Equipped with standard shock absorber (ref.2029).

Certified for horizontal use over sharp edges ($r \geq 0.5$ mm).

CE EN 355


CONSTRUCTION PYLONS/INDUSTRY ROOFS



Shock Absorber
Ref.2029
Maximum extension:
Fall factor 1 = 90cm
Fall factor 2 = 160cm
Maximum peak force:
<6kN (3.5-4.5kN approx.)

Titanium 10.5mm rope
Ref.1757
Breaking load 27.5kN

High strength polyamid stitching
Breaking load 22kN
Equipped with loop protection system

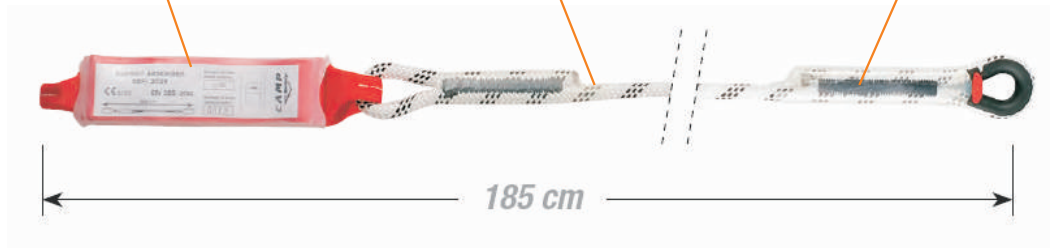

HORIZONTAL USE with RETRACTABLE FALL ARRESTERS Ref.2076-2077-2078

