

5030109 SHOCK ABSORBER ROPE

SINGLE 170 cm + 0981 + 0984

Fall arrest lanyards constructed from 10.5 mm polyamide static rope. Kernmantle rope with an internal core and woven sheath offers optimal durability.

Equipped with standard shock absorber (ref.2029). Certified for horizontal use over sharp edges ($r \geq 0.5$ mm).

CE EN 355

CONSTRUCTION

PYLONS/INDUSTRY


ROPE ACCESS



TECHNICAL SHEET

Shock Absorber
Ref.2029
Maximum extension:
Fall factor 1= 90 cm
Fall factor 2= 160 cm
Maximum peak force:
<6 kN (3.5-4.5 kN approx.)

10.5 mm
Static Rope

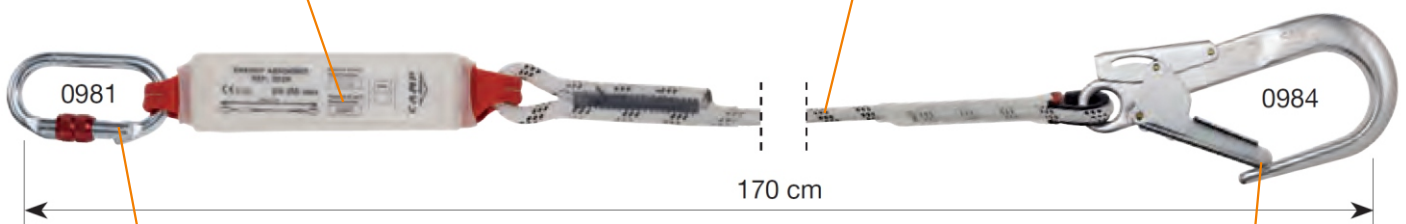

OVAL STANDARD LOCK Ref.0981
Zinc plated carbon steel
Breaking load 28 kN
Opening 16 mm

HOOK 60 mm opening
Ref.0984
Breaking load 25 kN