

# 5030202 SHOCK ABSORBER ROPE

DOUBLE 170 cm + 0981 + 2x0984

TECHNICAL SHEET

Fall arrest lanyards constructed from 10.5 mm polyamide static rope. Kernmantle rope with an internal core and woven sheath offers optimal durability.

Equipped with standard shock absorber (ref.2029). Certified for horizontal use over sharp edges ( $r \geq 0.5$  mm).


CE EN 355

CONSTRUCTION PYLONS/INDUSTRY ROPE ACCESS



Shock Absorber  
Ref.2029  
Maximum extension:  
Fall factor 1= 90 cm  
Fall factor 2= 160 cm  
Maximum peak force:  
<6 kN (3.5-4.5 kN approx.)

10.5 mm  
Static Rope

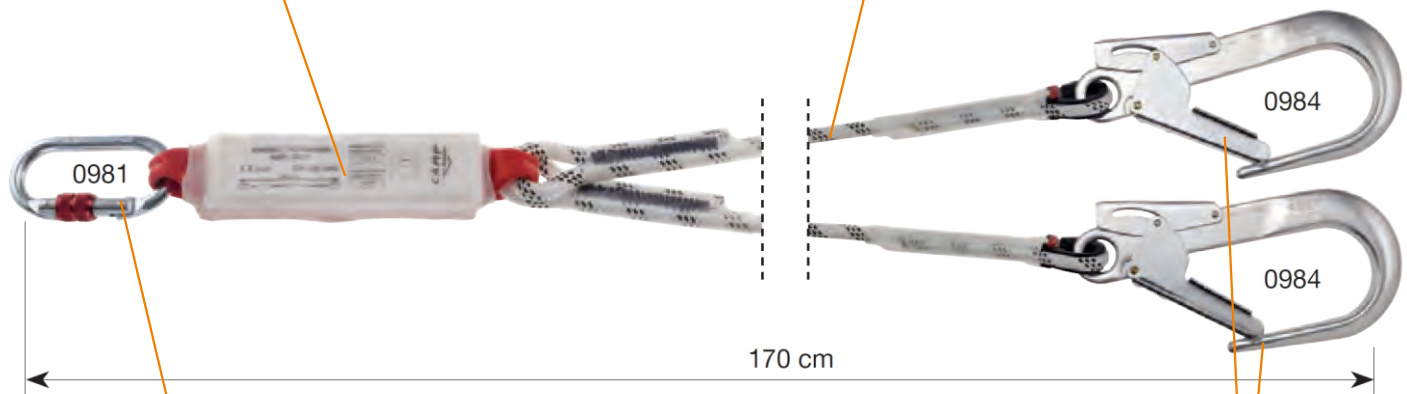

OVAL STANDARD LOCK Ref.0981  
Zinc plated carbon steel  
Breaking load 28 kN  
Opening 16 mm

HOOK 60 mm opening  
Ref.0984  
Breaking load 25 kN