

5040201 LIMITED LANYARDS

Lanyards equipped with innovative Shock Absorber Limited (ref.3029), for work areas closer to the ground where clearance is limited.

CE EN 355


CONSTRUCTION ROPE ACCESS CONFINED



TECHNICAL SHEET

Shock Absorber Ref.3029
Maximum extension:
Fall factor 1 = 50cm
Fall factor 2 = 70cm
Maximum peak force:
<6kN (4.5-5.5kN approx.)

Titanium 10.5 mm rope
Ref.1757
Breaking load 27.5 kN

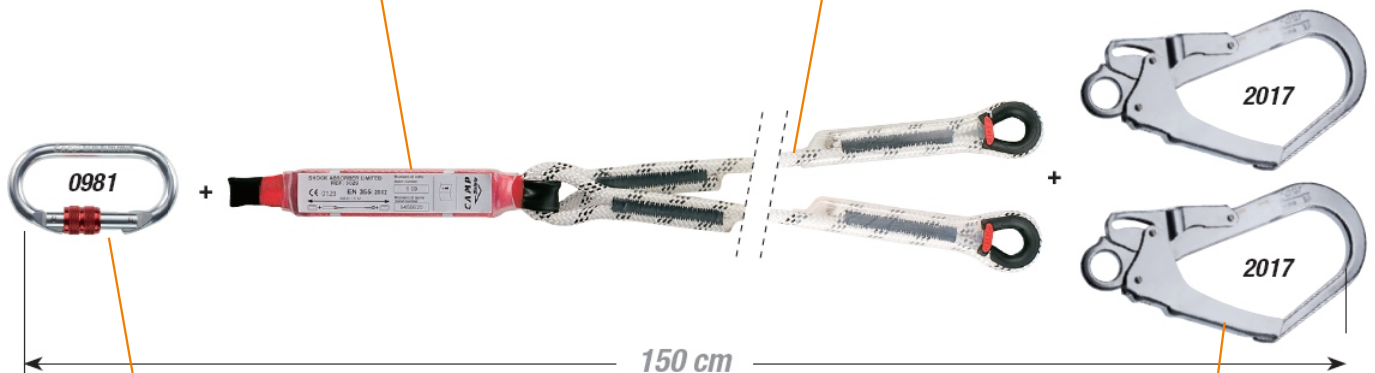

Oval screw connector Ref.0981
Zinc plated carbon steel
Breaking load 28 kN
Opening 16 mm

Safety hook Ref.2017
Zinc plated carbon steel
Breaking load 25 kN
Opening 53mm