

# 5040204 SHOCK ABSORBER LIMITED ROPE

DOUBLE 135 cm + 1176 + 2x098401



TECHNICAL SHEET

Fall arrest lanyards equipped with the Shock Absorber Limited (ref.3029) for work in areas that are closer to the ground or where clearance is limited.

Constructed from 10.5 mm polyamide static rope. Kernmantle rope with an internal core and woven sheath offers optimal durability.

Certified for horizontal use over sharp edges ( $r \geq 0.5$  mm).

CE EN 355

CONSTRUCTION

ROPE ACCESS

CONFINED



Shock Absorber Limited Ref.3029

Maximum extension:

Fall factor 1 = 50cm


Fall factor 2 = 70cm

Maximum peak force:

<6kN (4.5-5.5kN approx.)

Patented anti-rotation lever. Polyamid with stainless steel core

10.5 mm Static Rope

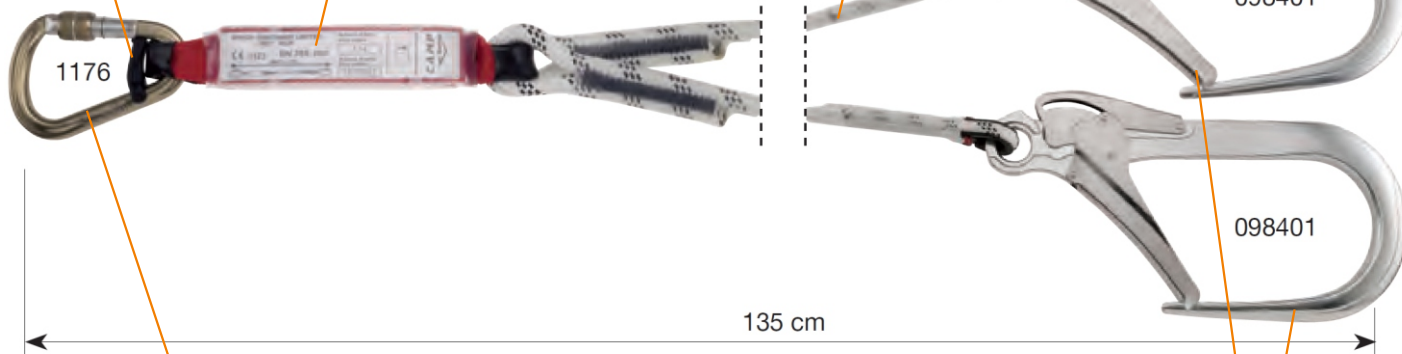

"HMS Belay Lock" ref.1176  
Screwgate aluminium  
Breaking load 23 kN  
Opening 42 mm

HOOK 110 mm opening  
Ref.098401  
Breaking load 25 kN