

5040205 SHOCK ABSORBER LIMITED ROPE



TECHNICAL SHEET

Fall arrest lanyards equipped with the Shock Absorber Limited (ref.3029) for work in areas that are closer to the ground or where clearance is limited.

Constructed from 10.5 mm polyamide static rope. Kernmantle rope with an internal core and woven sheath offers optimal durability. Certified for horizontal use over sharp edges ($r \geq 0.5$ mm).

CONSTRUCTION CONFINED

EDGE TESTED




Certified for horizontal use over sharp edges

Shock Absorber Limited Ref.3029
 Maximum extension:
 Fall factor 1 = 50 cm
 Fall factor 2 = 70 cm
 Maximum peak force:
 <6 kN (4.5-5.5 kN approx.)

10.5 mm polyamide static rope.

High strength polyamide stitching. Breaking load 22kN

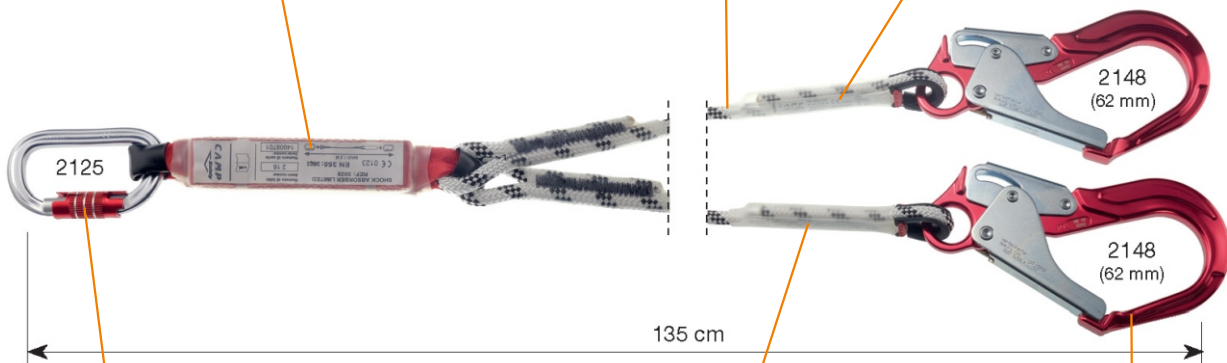

OVAL XL 3LOCK Ref.2125
 Aluminium alloy.
 Breaking load 28 kN
 Opening 20 mm

CE label with Batch and individual Serial Number included.

ANSI Hook 62 mm Ref.2148
 Aluminium alloy.
 ANSI and CSA certified with 16 kN / 3600 lbs gate strength.
 Breaking load 23 kN
 Opening 62 mm

Ref.	Product name Nombre del producto	Weight Peso		CE	 CNB/P/11.074
		g	oz		
5040205	SHOCK ABSORBER LIMITED ROPE DOUBLE 135 cm + 2125 + 2x2148	1670	59.0	EN 355	