


## CSR2-CE PULLEYS

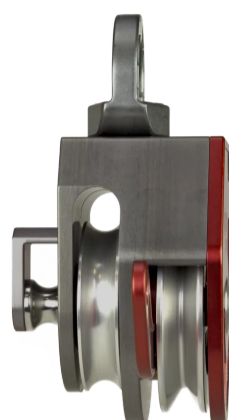

CE Model not available for purchase in the United States.

Please [click here](#) for the standard NFPA model.

For pricing and availability of the CE Model, please contact a [CMC dealer](#) in your area, or our customer support team at [info@cmcpro.com](mailto:info@cmcpro.com) or (805) 562-9120.

Pat. 7,419,138

The design of our redesigned CSR<sup>2</sup> (Confined Space Rescue) Pulley is stronger yet lighter and incorporates 7/16 in (11 mm) to 1/2 in (13 mm) life safety rope. Ideal for industrial applications as well as many rescue operations, the CSR<sup>2</sup> uses our proprietary, patented locking system, which eliminates a toothed cam or Prusik so it can be easily and safely released while under load. (The absence of the toothed cam means that even if the system is fully collapsed and pulled tight, it can still be released easily. Systems using a toothed cam must be raised even further before the cam can be released, which can be impossible if the system is fully collapsed without thinking about this problem ahead of time – causing potential problems with the load on the system becoming stuck.) An integral thrust-bearing swivel reduces torque by aligning the pulley with the load, thereby increasing efficiency and safety. Its larger size allows for the easy application of rescue-size carabiners.

Machined from a solid block of aircraft-grade aluminum, the CSR<sup>2</sup> features a high-strength aluminum side plate, sealed bearings and anodized aluminum sheaves. The side becket location allows for maximum lift height and full retraction of the system, and a removable becket cover facilitates changing out lifeline with sewn terminations.

CE models sold in Europe only.

- All-new stronger, lighter-weight design
- Max Rope Diameter ≤13 mm
- CE Certified – Meets EN 12278
- CSR<sup>2</sup>-CE Pulley MBS 46 kN (10,341 lbf) / CSR<sup>2</sup>-CE Double Pulley MBS 46 kN (10,341 lbf)
- Machined from solid block of aircraft-grade aluminum
- Made in USA

|                          |                             |
|--------------------------|-----------------------------|
| <b>Option</b>            | CSR2-CE Pulley              |
| <b>Item</b>              | 300343-CE                   |
| <b>PRODUCT NAME</b>      | PULLEY, CSR2-CE, CMC        |
| <b>WEIGHT</b>            | 1.1 KG (2.5 LB)             |
| <b>SHEAVE TREAD SIZE</b> | 57 X 13 MM (2 1/4 X 1/2 IN) |
| <b>COLOR</b>             | RED / GRAY                  |
| <b>CE CERTIFIED</b>      | EN 12278                    |
| <b>MBS</b>               | 46 KN (10,341 LBF)          |
| <b>Option</b>            | CSR2-CE Double Pulley       |
| <b>Item</b>              | 300342-CE                   |
| <b>PRODUCT NAME</b>      | PULLEY, CSR2-CE DOUBLE, CMC |
| <b>WEIGHT</b>            | 680 G (1.5 LB)              |
| <b>SHEAVE TREAD SIZE</b> | 57 X 13 MM (2 1/4 X 1/2 IN) |
| <b>COLOR</b>             | GRAY                        |
| <b>CE CERTIFIED</b>      | EN 12278                    |
| <b>MBS</b>               | 46 KN (10,341 LBF)          |