

SCREW DOWN METAL ROOF ANCHOR


ANCHORAGE CONNECTOR

FEATURES & BENEFITS

SHOWN:
PART #00255

- Easy to install on flat wood, concrete, or metal substrates
- Rotates full 360 degrees
- Compatible with most Guardian SRLS up to 50'
- Power-coated steel for increased durability

Z

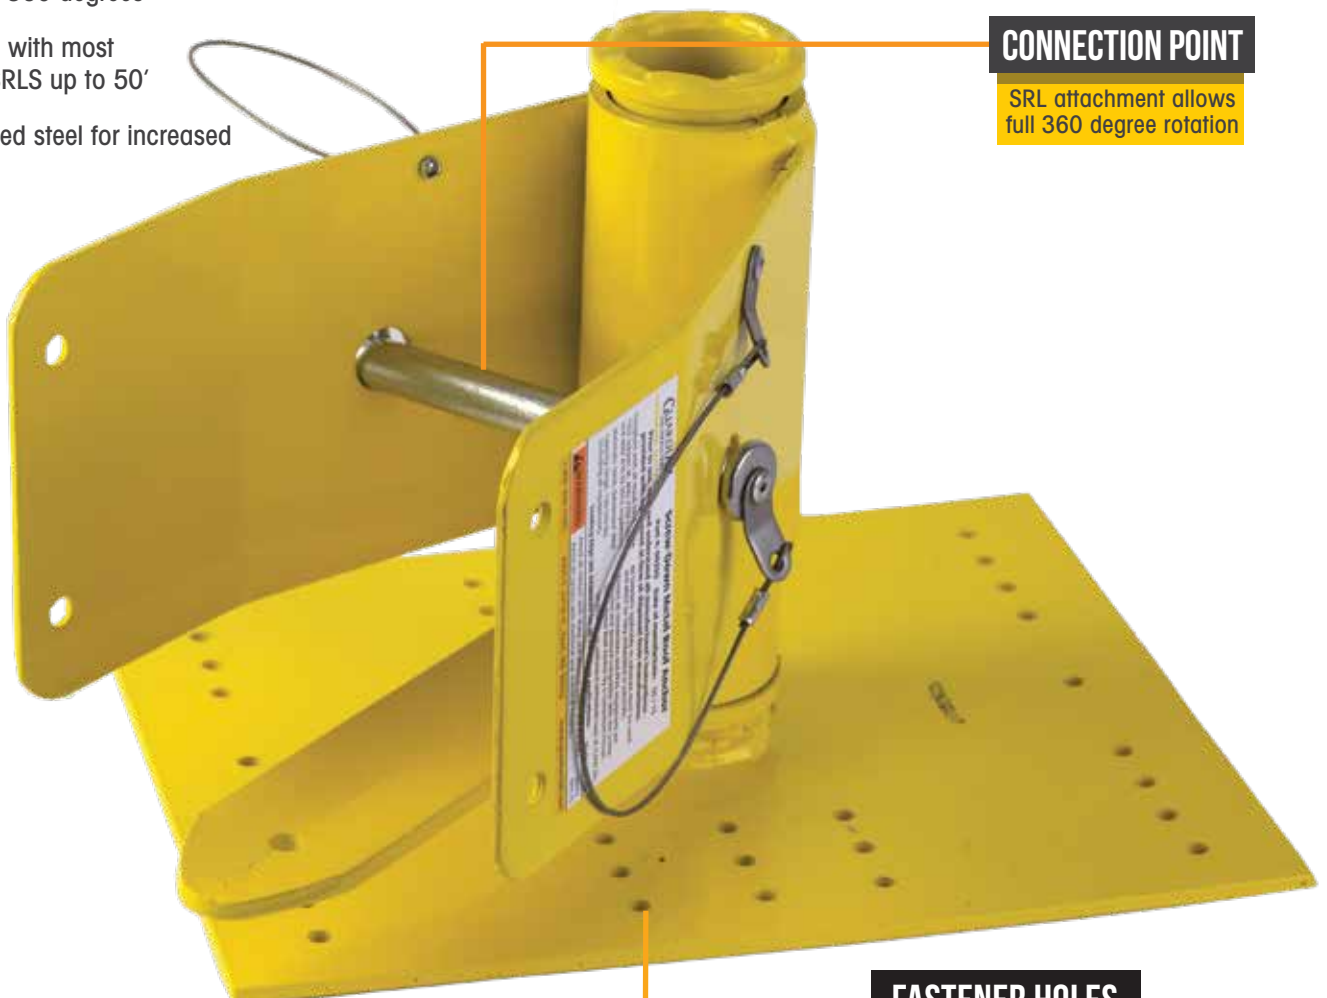

CONNECTION POINT

SRL attachment allows full 360 degree rotation

FASTENER HOLES

Installs to wood, metal, or concrete

SPECIFICATIONS

STANDARDS:

OSHA 1910, OSHA 1926 Subpart M

MATERIALS:

Powder-coated steel

WORKER CAPACITY:

130 - 310 lbs.

PERFORMANCE:

- Maximum Users: 1

NOTES:

- MUST be used in combination with SRL.
- Compatible with Guardian Fall Protection SRLs up to 50' in length.
- To use with SRLs from between 50-65', Retractable Swivel Adaptor (#10975) is required.
- Minimum substrate requirements:
Wood: 3/4" CDX.
Metal: minimum 24 gauge.

PART

DESCRIPTION

WEIGHT

00255

Screw Down Metal Roof Anchor

14.75 Lbs

APPLICATIONS



PERSONAL FALL ARREST:

Screw-Down Metal Roof Anchors may be used in Personal Fall Arrest applications to support:

- MAXIMUM 1 Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs.
- Maximum permitted free fall is 6' for LE applications only.
- No free fall is permitted when used with non LE-SRL.
- Applicable D-rings: Dorsal



RESTRAINT:

Screw-Down Metal Roof Anchors may be used in Restraint applications. Restraint systems:

- Prevent workers from reaching the leading edge of a fall hazard.
- Always account for fully deployed length of lanyard / SRL.
- Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs.
- No free fall is permitted.
- Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal).
- Applicable D-rings: Dorsal, Chest, Side, Shoulder.



NEED MORE INFORMATION?

P: 1.800.466.6385 | VISIT OUR WEBSITE: GUARDIANFALL.COM