


SNAPPY DISPOSABLE ANCHOR

ANCHORAGE CONNECTOR

FEATURES & BENEFITS

- Easy to install and remove
- Can be bent to fit any roof pitch
- Disposable anchor
- Fasteners included

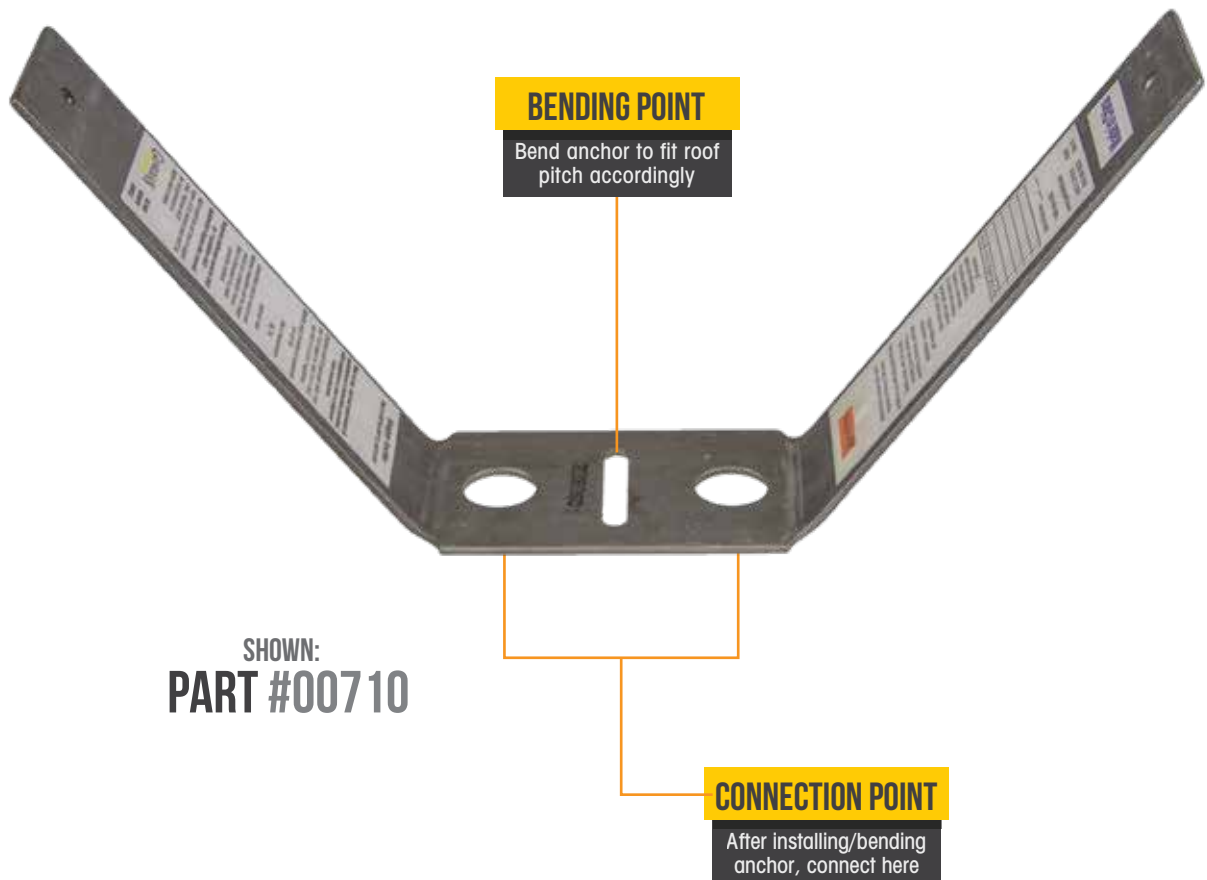

SPECIFICATIONS

STANDARDS:

OSHA 1926 Subpart M & 1910

WORKER CAPACITY:

130-420 lbs.

NOTES:

- Must be installed in wood substrates only
- MINIMUM substrate thickness: 3 1/2" combined thickness
- All fasteners must be fully embedded in substrate.

MATERIALS:

Steel

PERFORMANCE:

- Maximum Users: 1
- 5,000 lb. MBS (Minimum Breaking Strength)

PART #	DESCRIPTION	WEIGHT
00710	Snappy Disposable Roof Anchor for any pitch roof. (Qty 25)	25 Lbs
00711	Snappy Disposable Roof Anchor for any pitch roof. (Qty 8)	8 Lbs
00715-TV	Snappy Disposable Roof Anchor for any pitch roof. (Qty 24) Powdercoated, PetersenDean	24 Lbs

APPLICATIONS



PERSONAL FALL ARREST:

Snappy Anchors may be used in Personal Fall Arrest applications to support:

- MAXIMUM 1 Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs.
- Maximum free fall is 6'.
- Applicable D-rings: Dorsal.



RESTRAINT:

Snappy Anchors may be used in Restraint applications. Restraint systems:

- Prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL.
- Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs.
- No free fall is permitted.
- May only be used on surfaces with slopes up to 4/12 (vertical/horizontal).
- Applicable D-rings: Dorsal, Chest, Side, & Shoulder.



NEED MORE INFORMATION?

P: 1.800.466.6385 | VISIT OUR WEBSITE: GUARDIANFALL.COM