


HTL

HORIZONTAL LIFELINE

TECHNICAL DATA & SELL SHEET - ISSUE 1

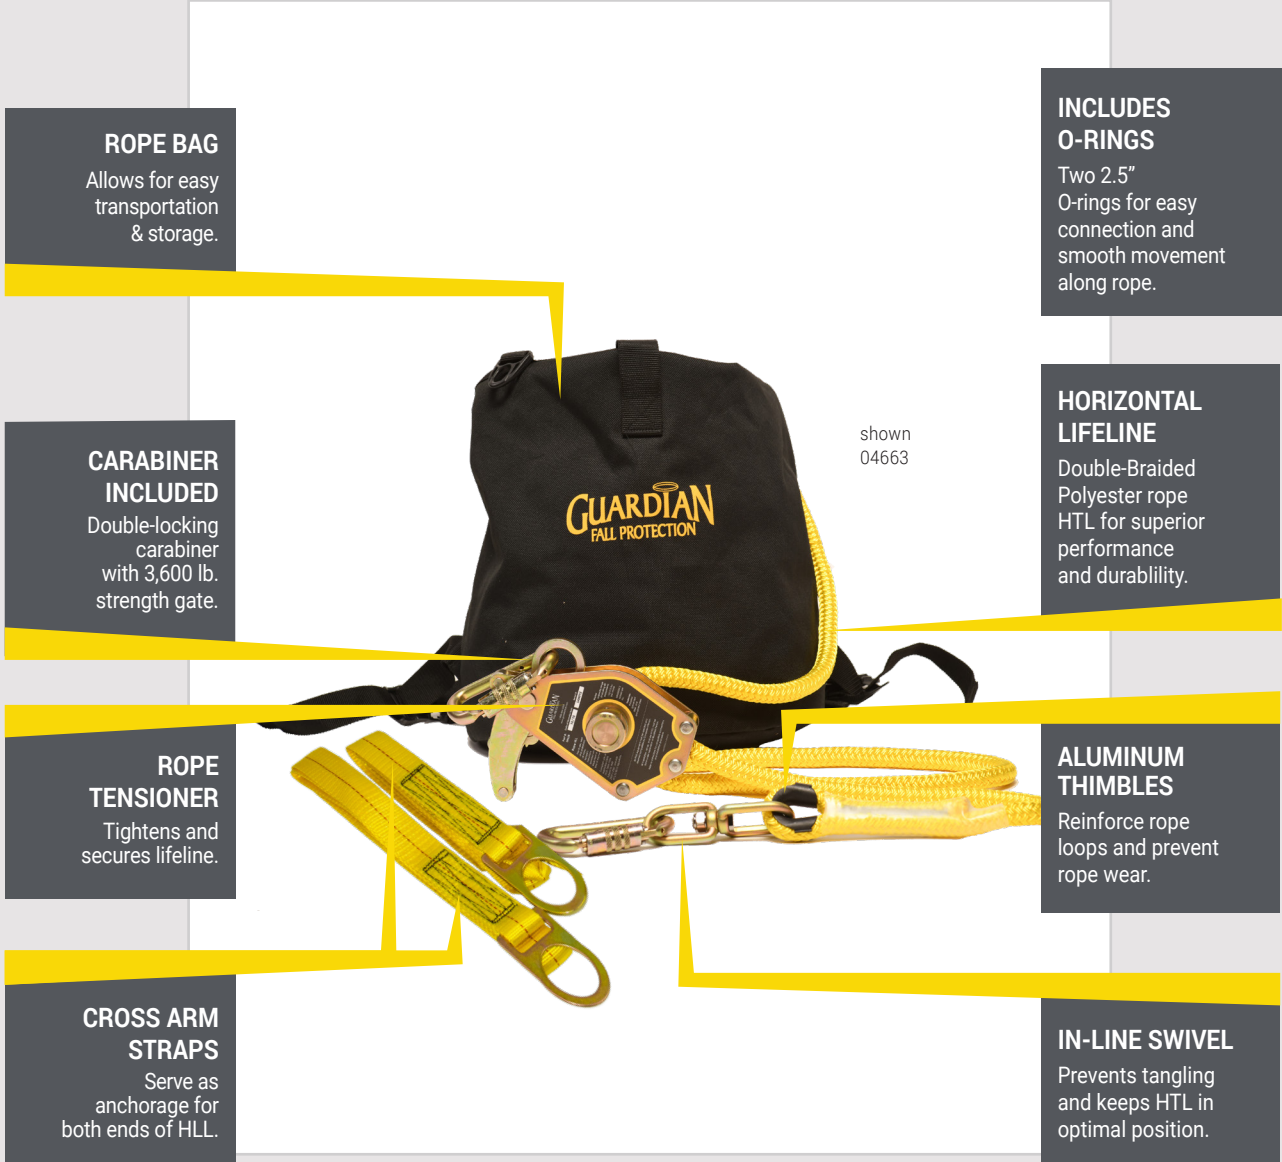

ROPE BAG
Allows for easy transportation & storage.

INCLUDES O-RINGS
Two 2.5" O-rings for easy connection and smooth movement along rope.

CARABINER INCLUDED
Double-locking carabiner with 3,600 lb. strength gate.

HORIZONTAL LIFELINE
Double-Braided Polyester rope HTL for superior performance and durability.

shown
04663

ROPE TENSIONER
Tightens and secures lifeline.

ALUMINUM THIMBLES
Reinforce rope loops and prevent rope wear.

CROSS ARM STRAPS
Serve as anchorage for both ends of HLL.

IN-LINE SWIVEL
Prevents tangling and keeps HTL in optimal position.

Tensioner: Zinc-Plated Steel **Rope:** Double-Braided Polyester
Cross Arm Straps: Double-Braided Polyester & Galvanized Steel
O-Rings: Galvanized Steel **Capacity:** 130-310 lbs. (per worker)

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**

HTL

HORIZONTAL LIFELINE

TECHNICAL DATA & SELL SHEET - ISSUE 1

Standards

- OSHA 1910
- OSHA 1926 Subpart M



Performance:

- Maximum Users: 2
- Minimum Breaking Strength (MBS): 5,000 lbs.

Notes:

- If HLL anchorage is installed below worker's harness dorsal D-ring, worker must use an extended free fall connecting device
- Never for simultaneous use in Fall Arrest & Fall Restraint

Applications



Personal Fall Arrest: HTL may be used to support a MAXIMUM 2 PFAS for use in Fall Arrest applications. Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs. Maximum free fall is 6', or up to 12' if used in combination with equipment explicitly certified for such use. Applicable D-ring: Dorsal.



Restraint: HTL may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. No free fall is permitted. Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, & Shoulder.

Prod. Code	Description	Length
04663	HTL 30 w/(1) Tensioner, (2) 2.5" O-rings, (2) 6' Cross Arm Straps, (2) Carabiners, & (1) Carrying Bag	30'
04664	HTL 60 w/(1) Tensioner, (2) 2.5" O-rings, (2) 6' Cross Arm Straps, (2) Carabiners, & (1) Carrying Bag	60'
04665	HTL 100 w/(1) Tensioner, (2) 2.5" O-rings, (2) 6' Cross Arm Straps, (2) Carabiners, & (1) Carrying Bag	100'