

Lifting Bag


For lifting of equipment

USER INSTRUCTIONS



Product Code	WLL (kg)	Lift Configuration
B05	7	fig 1
B10	8	fig 1
B31	18	fig 6
B45B	25	fig 5
B55	15	fig 2
B62	14	fig 1
B70	5	fig 3
B74	5	fig 3
B76	5	fig 3
BL30	25	fig 5
BR04	31	fig 4

Use

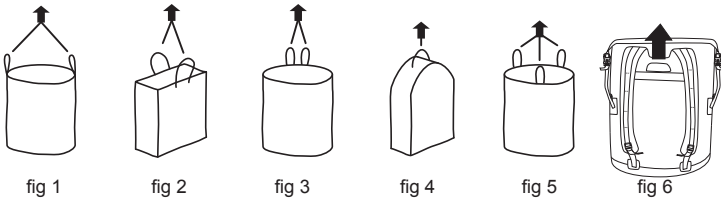

Only lift as shown on the label. Do not place sharp objects in the bag – risk of puncturing. Spread load evenly, ensure bag is closed and load is contained and secure before lifting.

BL30 should be used with the white plastic inner.

Batch No. is the date in the following form: day/month/year
The ID No. is unique to this item.

Factor of Safety 7:1 – the minimum breaking load divided by 7 to give the Working Load Limit as marked. This may be down rated further by a competent person to give a Safe Working Load if required.

The WLL rating of the bag includes any items attached to tool loops or daisy chains.

Load limits on daisy chains are for the whole chain

B31 can be locked by passing a cable tie or lock between the loop on the side strap and the loop above the buckle.

Declaration

This lifting bag has been assessed against the Machinery Directive 2006/42/EC

Working Load Limit (WLL) as marked on the item.

The heightec Group Ltd, Kendal, LA9 6NH, UK.

Approval

This product has been assessed against the requirements of the Machinery Directive 2006/42/EC.

However, it is not classed as a lifting accessory as defined in Article 2 (d) of the directive and as such it cannot be CE marked as lifting equipment.

For more information please see the European commission website:

http://ec.europa.eu/enterprise/sectors/mechanical/files/machinery/class-equip-lifting-mach_en.pdf

Lifting Bag


For lifting of equipment

USER INSTRUCTIONS



Product Code	WLL (kg)	Lift Configuration
B05	7	fig 1
B10	8	fig 1
B31	18	fig 6
B45B	25	fig 5
B55	15	fig 2
B62	14	fig 1
B70	5	fig 3
B74	5	fig 3
B76	5	fig 3
BL30	25	fig 5
BR04	31	fig 4

Use

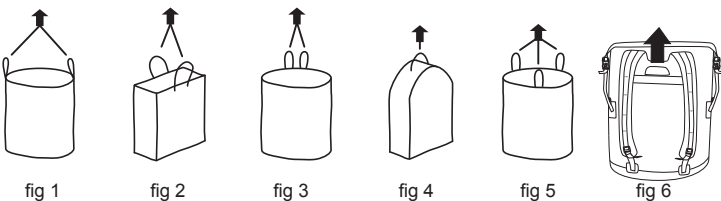

Only lift as shown on the label. Do not place sharp objects in the bag – risk of puncturing. Spread load evenly, ensure bag is closed and load is contained and secure before lifting.

BL30 should be used with the white plastic inner.

Batch No. is the date in the following form: day/month/year
The ID No. is unique to this item.

Factor of Safety 7:1 – the minimum breaking load divided by 7 to give the Working Load Limit as marked. This may be down rated further by a competent person to give a Safe Working Load if required.

The WLL rating of the bag includes any items attached to tool loops or daisy chains.

Load limits on daisy chains are for the whole chain

B31 can be locked by passing a cable tie or lock between the loop on the side strap and the loop above the buckle.

Declaration

This lifting bag has been assessed against the Machinery Directive 2006/42/EC

Working Load Limit (WLL) as marked on the item.

The heightec Group Ltd, Kendal, LA9 6NH, UK.

Approval

This product has been assessed against the requirements of the Machinery Directive 2006/42/EC.

However, it is not classed as a lifting accessory as defined in Article 2 (d) of the directive and as such it cannot be CE marked as lifting equipment.

For more information please see the European commission website:

http://ec.europa.eu/enterprise/sectors/mechanical/files/machinery/class-equip-lifting-mach_en.pdf

Inspection and care

The strength of this product may be affected by cuts, nicks, deep scratches, wear, abrasion, deformation, chemical contamination, UV degradation, exposure to flame, extreme temperatures and other factors. Keep this equipment away from such sources of damage.

Use this product with caution near moving machinery, electrical hazards, sharp edges and abrasive surfaces.

This product must be inspected before and after use, to ensure it is in a suitable condition and operates correctly.

If there is any doubt about condition of the product, or it has been subjected to a fall or substantial shock load, withdraw it from use until confirmed to be safe, in writing, by a competent person*.

No repairs of this product should be undertaken, any attempt to do so may invalidate it's compliance and/ or certification.

The safety of users depends upon the continued efficiency and durability of this equipment, which must be subjected to detailed visual and tactile examination by a competent person* at intervals of no greater than 6 months taking into account relevant legislation, equipment type, frequency of use and environmental conditions. Thorough examinations should include confirmation of the legibility of product markings.

*A competent person may be defined as someone who "...has appropriate theoretical and practical knowledge and experience..."

The results of examinations should be recorded. Intermittent inspections of components which may be subject to excessive wear may also be appropriate. The results of these need not be recorded. Contact your distributor for information on suitable inspection procedures.

Inspection criteria:

Check material and stitching for damage including cuts, nicks, abrasion, fraying, discolouration, heat or chemical damage etc.

Inspection and care

The strength of this product may be affected by cuts, nicks, deep scratches, wear, abrasion, deformation, chemical contamination, UV degradation, exposure to flame, extreme temperatures and other factors. Keep this equipment away from such sources of damage.

Use this product with caution near moving machinery, electrical hazards, sharp edges and abrasive surfaces.

This product must be inspected before and after use, to ensure it is in a suitable condition and operates correctly.

If there is any doubt about condition of the product, or it has been subjected to a fall or substantial shock load, withdraw it from use until confirmed to be safe, in writing, by a competent person*.

No repairs of this product should be undertaken, any attempt to do so may invalidate it's compliance and/ or certification.

The safety of users depends upon the continued efficiency and durability of this equipment, which must be subjected to detailed visual and tactile examination by a competent person* at intervals of no greater than 6 months taking into account relevant legislation, equipment type, frequency of use and environmental conditions. Thorough examinations should include confirmation of the legibility of product markings.

*A competent person may be defined as someone who "...has appropriate theoretical and practical knowledge and experience..."

The results of examinations should be recorded. Intermittent inspections of components which may be subject to excessive wear may also be appropriate. The results of these need not be recorded. Contact your distributor for information on suitable inspection procedures.

Inspection criteria:

Check material and stitching for damage including cuts, nicks, abrasion, fraying, discolouration, heat or chemical damage etc.

Cleaning, maintenance and storage:

Wash textiles by hand with non-detergent soap at approx 25°C (cool). Rinse and dry naturally, away from direct sources of heat and sunlight. If necessary use a disinfectant compatible with polyamide and polyester. Use diluted and rinse thoroughly in clean water. Dry as previously stated. These cleaning procedures must be strictly adhered to.

Lifespan:

Textile products or elements: maximum 10 year lifespan from date of manufacture, subject to competent use, maintenance and examination programme.

Metal products: indefinite lifespan, subject to competent use, care and examination programme. The lifespan of all products will be reduced by normal wear and tear, particularly when used in abrasive or corrosive environments. In extreme circumstances, the life of an item may be reduced to a single use.

Guarantee:

This product is guaranteed for three years against faults arising from manufacturing errors or materials defects. This guarantee does not include normal wear and tear, faults arising from uses for which the product was not designed and accidental damage.

This product should remain traceable to the original certificate of conformity and a permanent record should be kept of its use. This user instruction forms part of the permanent product record. All users must receive and read a copy of these instructions and should understand what the instructions mean and be familiar with them, including, but not limited to function, suitability, compatibility of the product and inspection for defects arising from damage. A copy of this user instruction should be kept with the equipment, and referred to before and after each use.

Do not use this product outside of its limitations or if you are unsure of any aspect of its use. No alterations or additions may be made to the product. The heightec Group do not take any responsibility for injury or accident of any kind arising from the use of this product.

Cleaning, maintenance and storage:

Wash textiles by hand with non-detergent soap at approx 25°C (cool). Rinse and dry naturally, away from direct sources of heat and sunlight. If necessary use a disinfectant compatible with polyamide and polyester. Use diluted and rinse thoroughly in clean water. Dry as previously stated. These cleaning procedures must be strictly adhered to.

Lifespan:

Textile products or elements: maximum 10 year lifespan from date of manufacture, subject to competent use, maintenance and examination programme.

Metal products: indefinite lifespan, subject to competent use, care and examination programme. The lifespan of all products will be reduced by normal wear and tear, particularly when used in abrasive or corrosive environments. In extreme circumstances, the life of an item may be reduced to a single use.

Guarantee:

This product is guaranteed for three years against faults arising from manufacturing errors or materials defects. This guarantee does not include normal wear and tear, faults arising from uses for which the product was not designed and accidental damage.

This product should remain traceable to the original certificate of conformity and a permanent record should be kept of its use. This user instruction forms part of the permanent product record. All users must receive and read a copy of these instructions and should understand what the instructions mean and be familiar with them, including, but not limited to function, suitability, compatibility of the product and inspection for defects arising from damage. A copy of this user instruction should be kept with the equipment, and referred to before and after each use.

Do not use this product outside of its limitations or if you are unsure of any aspect of its use. No alterations or additions may be made to the product. The heightec Group do not take any responsibility for injury or accident of any kind arising from the use of this product.