



RP700 Double Rescue Pulley (One-way Bearings)

Data Sheet



To assist in controlling the lower/release, the one-way bearings (when roped correctly) will not turn, which means that they then act as a static bollard thereby giving the operator greater control.

climb. work. rescue.

I|S|C


SOLUTIONS IN METAL

This rescue pulley can be used in a range of applications, such as hauling, tensioning & work positioning heavy loads.

(PPE Directive 89/686/EC)



62mm (2^{7/16}")

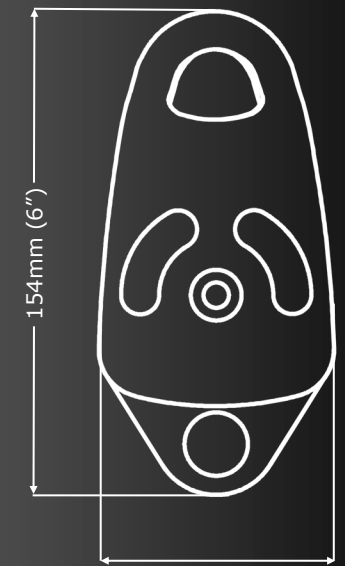

154mm (6")

74mm (2^{15/16}")

Weight	649g (23oz)
Body Material	Aluminium
Finish	Anodised
WLL	600kg (1323lbs)
Rope Size	10-13mm (3/8"-1/2")
MBS	30kN (6744lbf)