
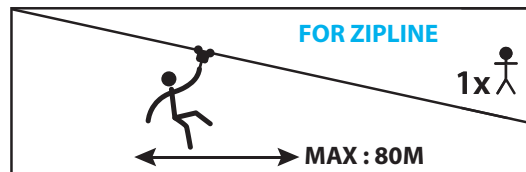


ZAZA2 PBJ






Patent deposit

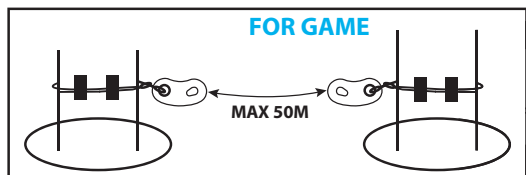



ADVANTAGES

- Easy to install
- No CLAMP

No maintenance






OU




FIXATION EXAMPLE


ROUND TEXTILE SLING TYPT "E"

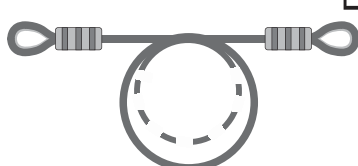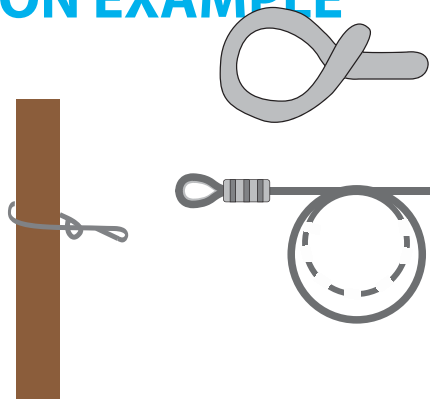


CABLES Ø12 or 1/2"
METAL CORE

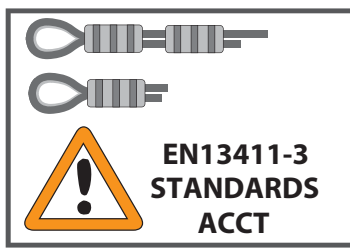

Operation 1

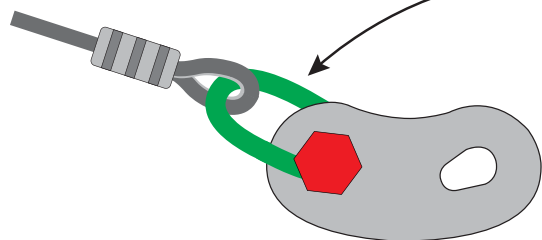

x1




= HR 2T - HS 1/2"

STANDARDS OF ASSEMBLY



EN 15567-1
EN 13411-3
STANDARDS - ACCT


Operation 2

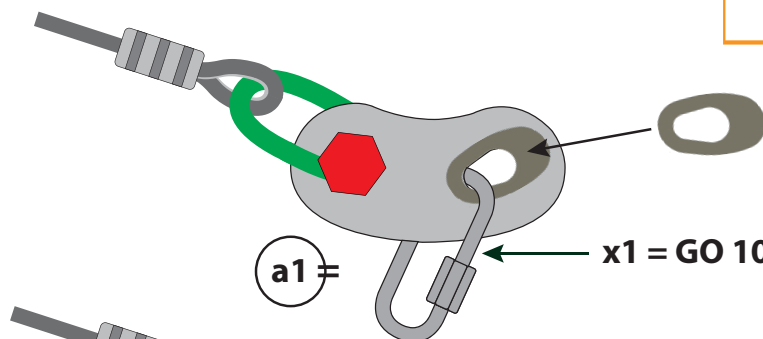

GUIDING PLATE

a1 =

x1 = GO 10 - LO 7/16"

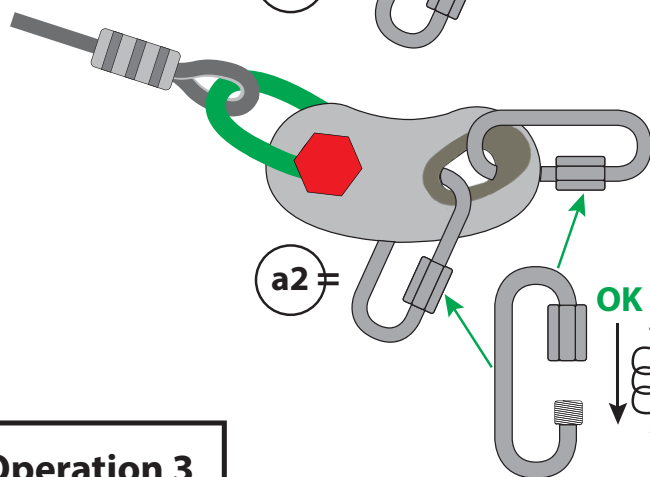

FOR GAMES x1 = GO 12 - LO 1/2"

FOR ZIPLINE

x1 = GO 14 - LO 9/16"


a2 =

OK

NO!

Operation 3

● INSTALLATION of STARTING PLATE

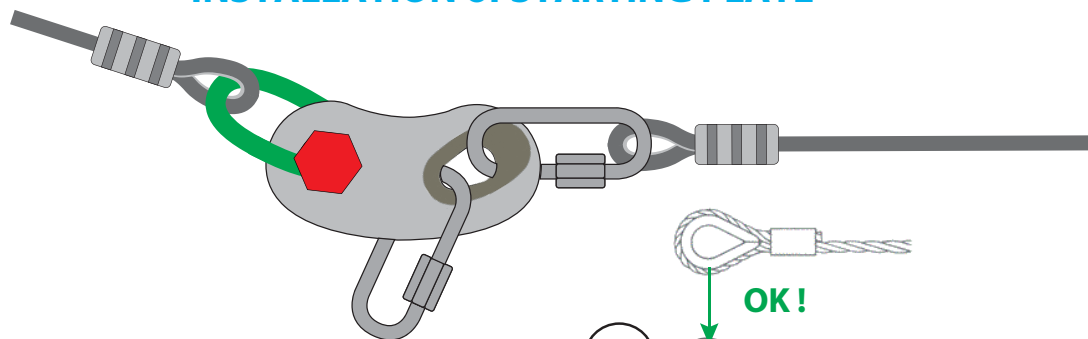

OK!


a3 =

x 130KN




Operation 4

● INSTALLATION of ARRIVALL PLATE

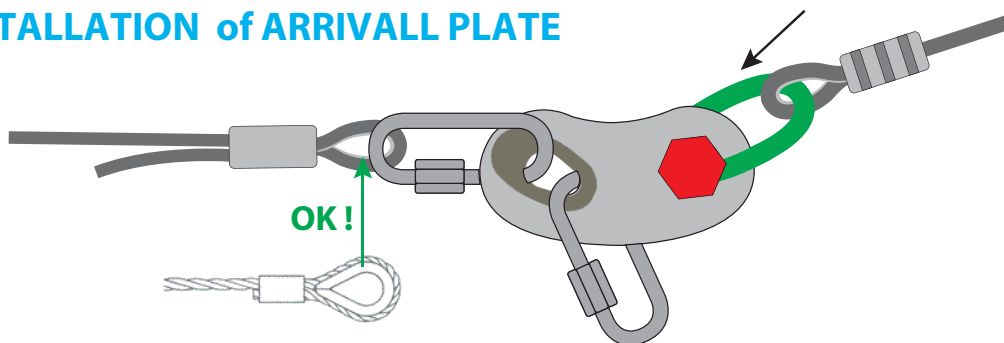


Operation 5

● CABLE TENSION

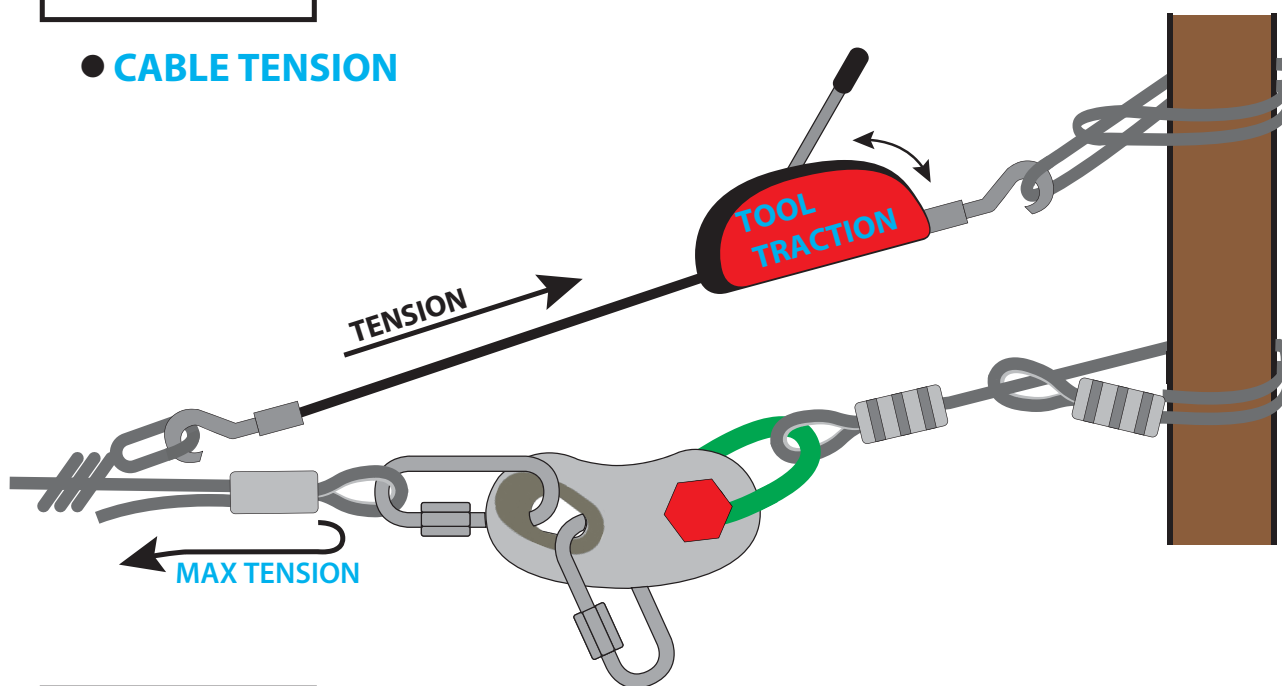

Operation 6


● TO CRIMP

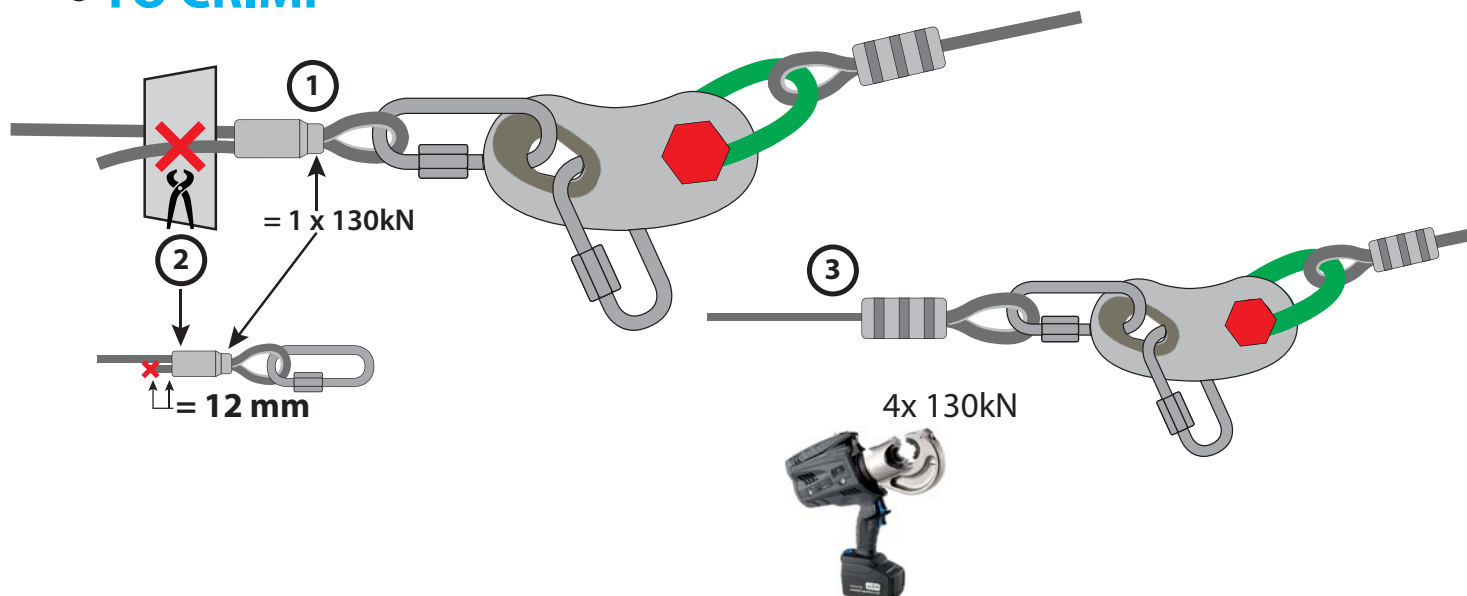

Operation 7


● OPTION:

TENSION SYSTEM = FOR ZIPLINE

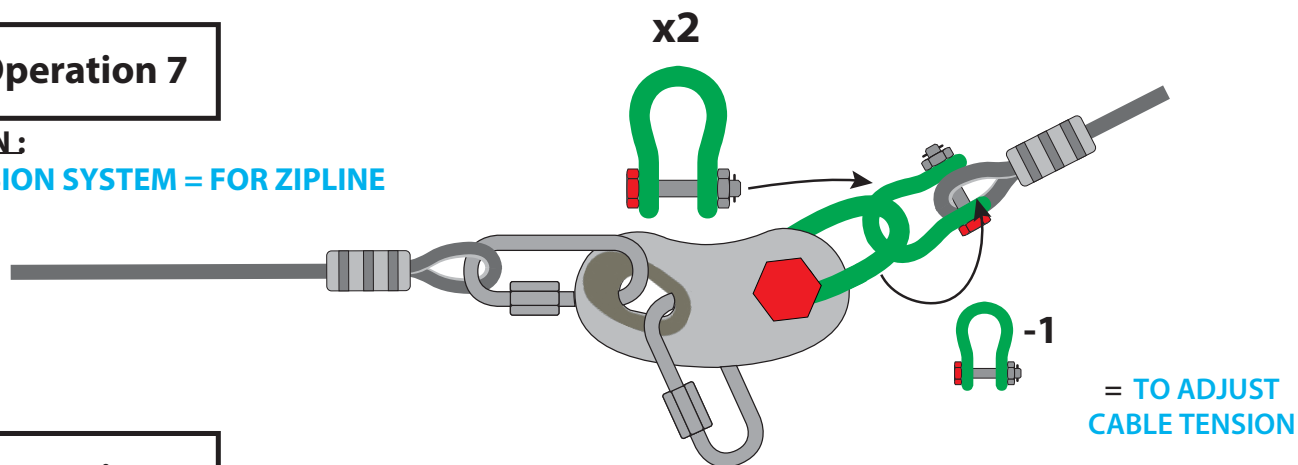

Operation 8

● RECOMMANDATION ASSEMBLY

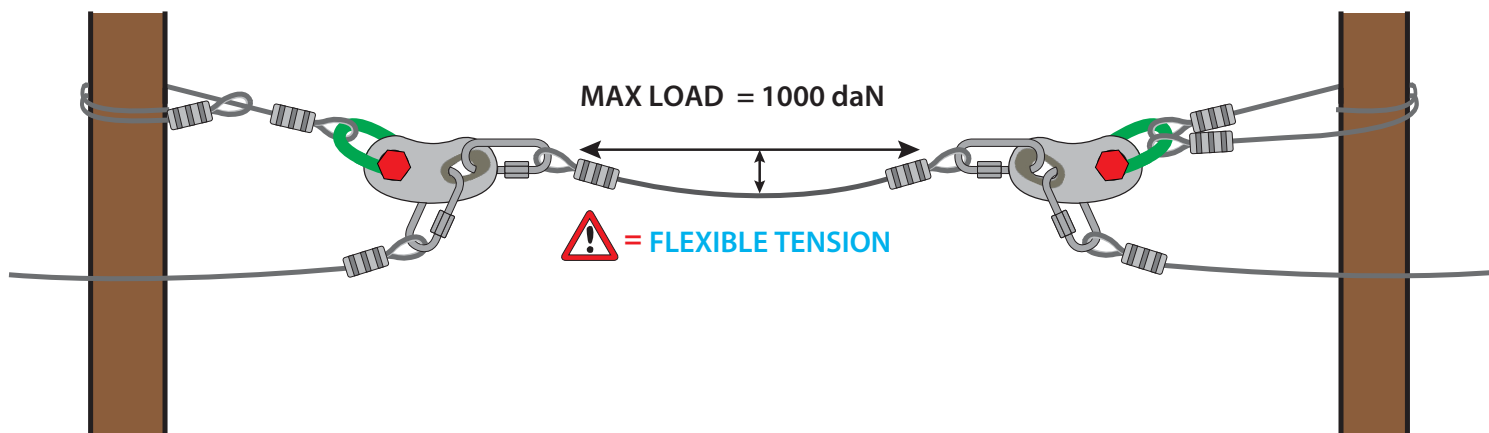

Operation 9

● JUNCTION

NOT contractual Examples
system for fixation

