

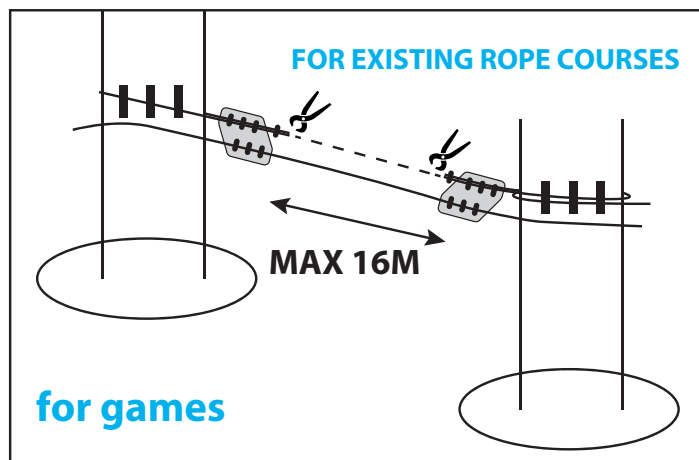




ZAZA2 PLM





ADVANTAGES

- Easy to install
- Adaptable on rope courses without modification





=








FIXATION EXAMPLE




ROUND TEXTILE SLING TYPT "E"



CABLES ø12 or 1/2" METALLIC CORE

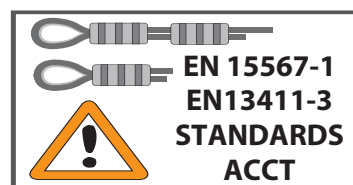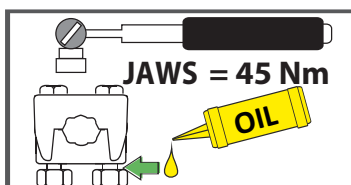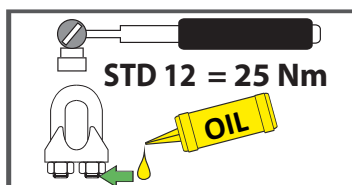


Operation 1

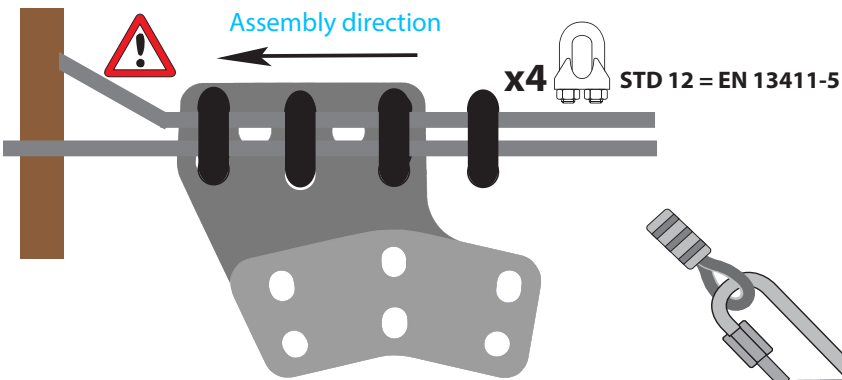

STANDARDS OF ASSEMBLY





EN 15567-1
EN 13411-1/7
STANDARDS - ACCT

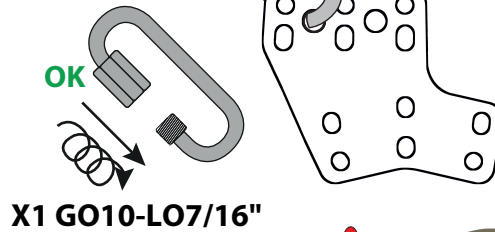



MANDATORY!

GUIDING PLATE
= **CORRECT ASSEMBLY**

Operation 2

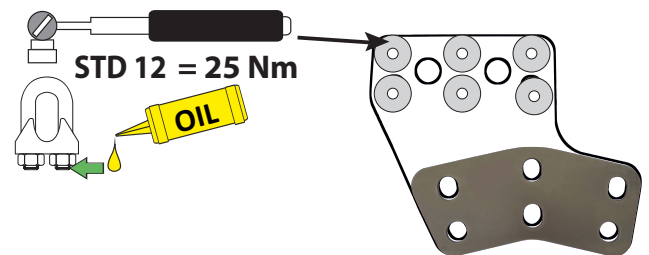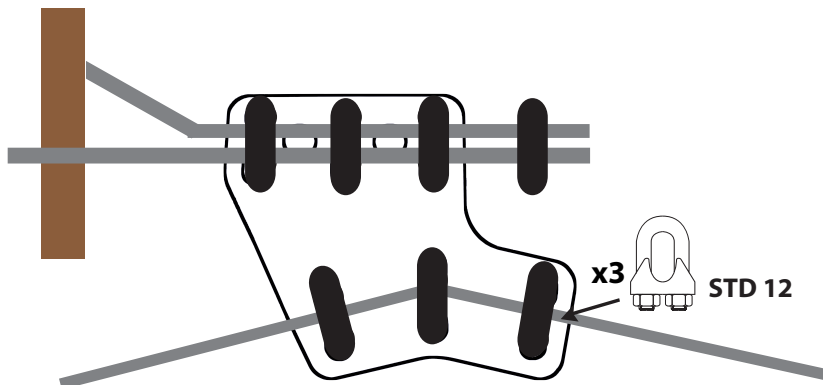


Operation 2 Bis

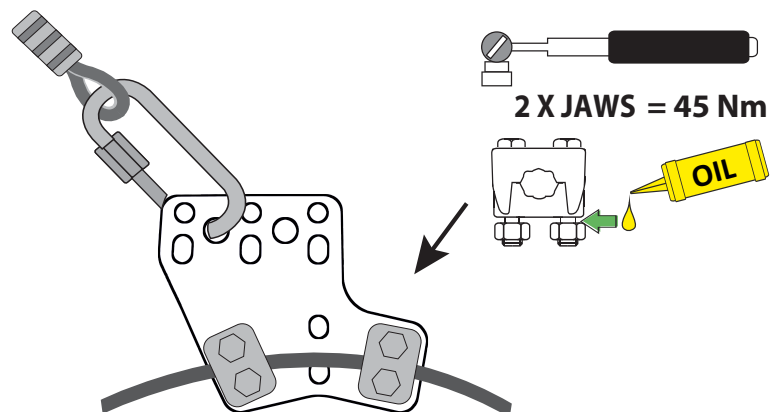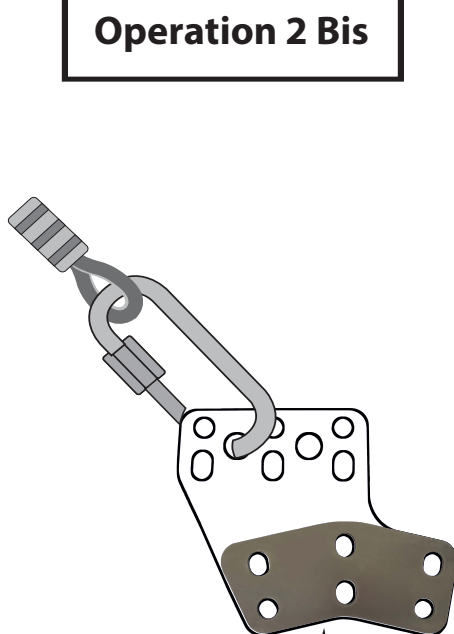


GUIDING PLATE
= **CORRECT ASSEMBLY**



MANDATORY!

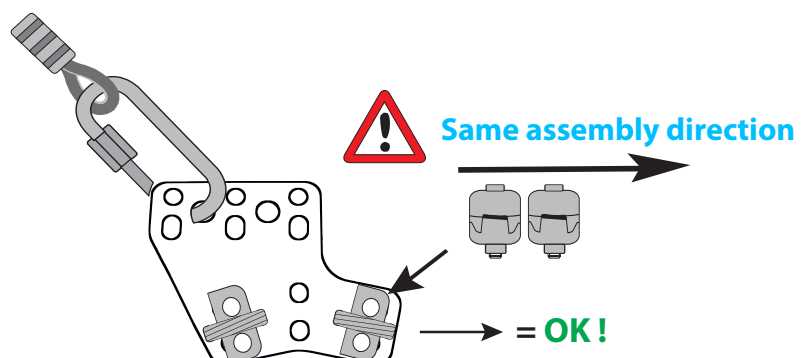


Operation 3

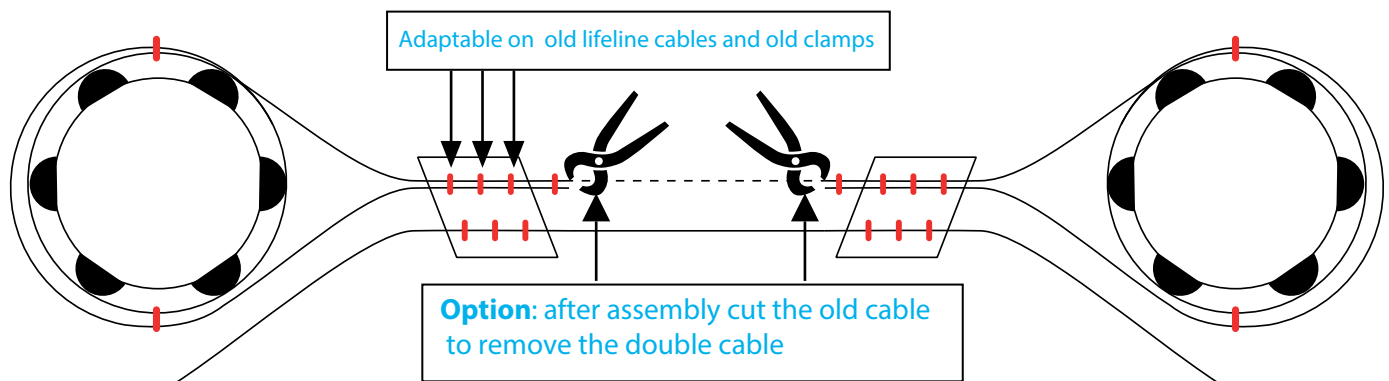


STANDARDS OF ASSEMBLY



EN 15567-1
EN 13411-1/7
STANDARDS - ACCT


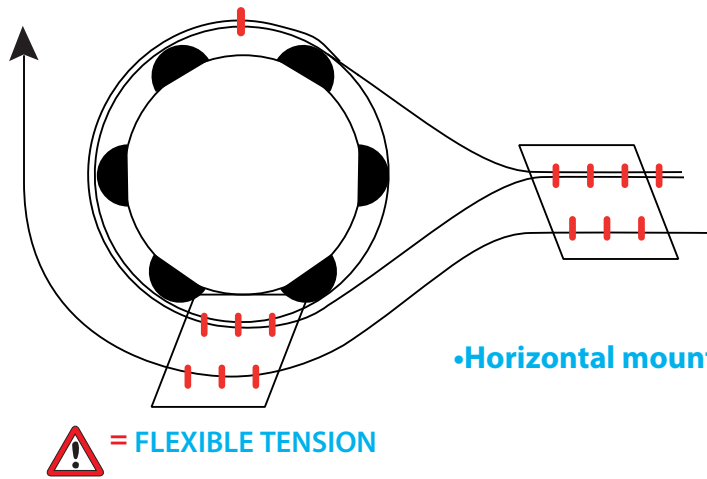


•Horizontal mounting for turn $< 90^\circ$

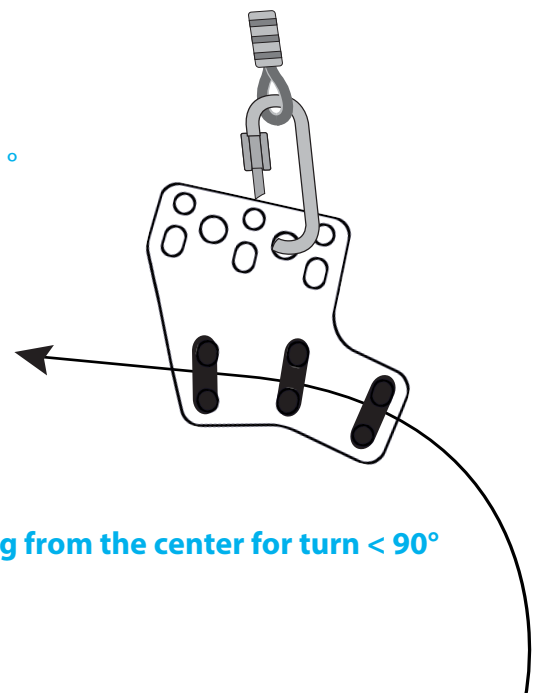

•Hanging from the center for turn $< 90^\circ$

•Starting plate

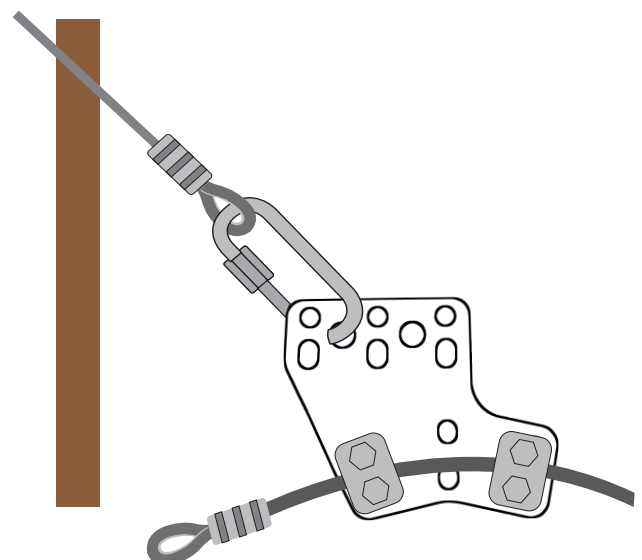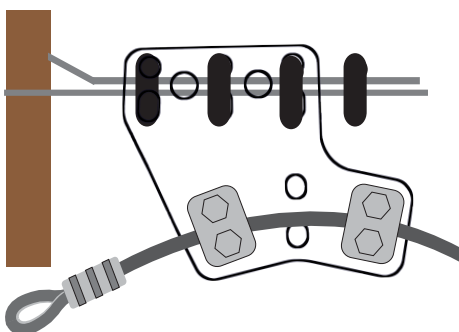


Operation 4





OBSERVE FITTING ORIENTATION OF BG CLAMPS



JAWS Ø12 mm




= OBSERVE THE DIRECTION OF CIRCULATION OF THE SAFETY HOOK

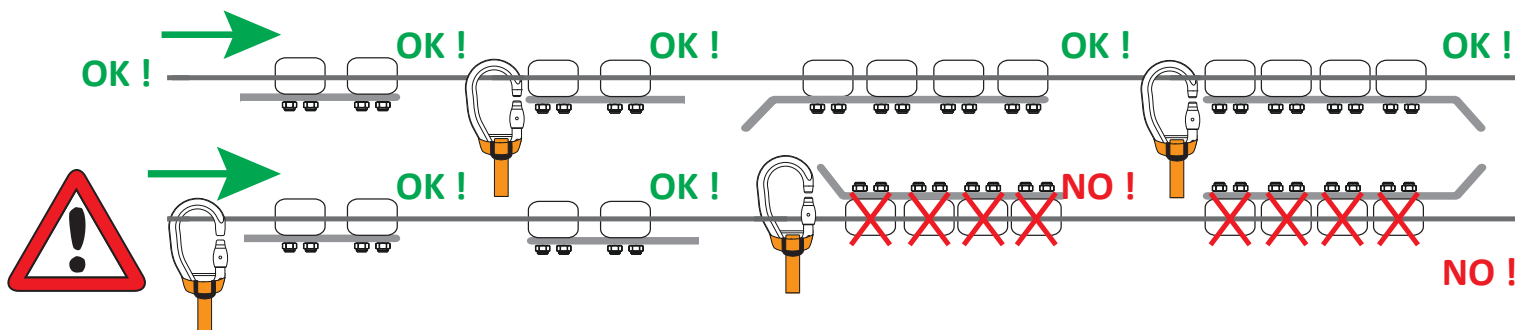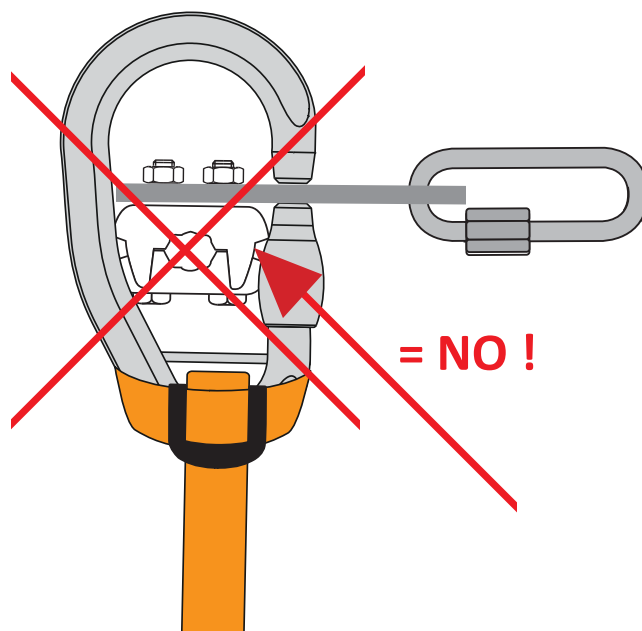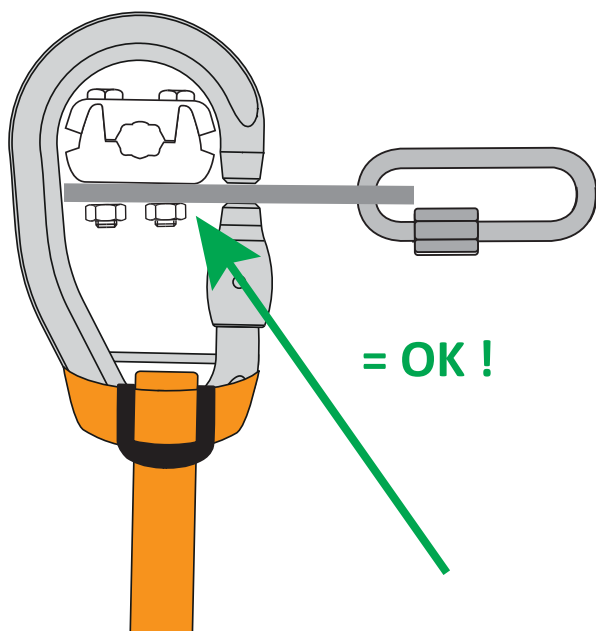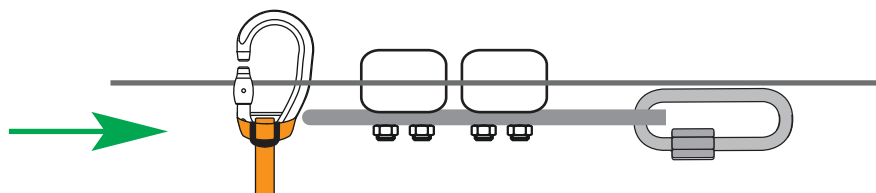

Operation 5

RECOMMENDATION ASSEMBLY

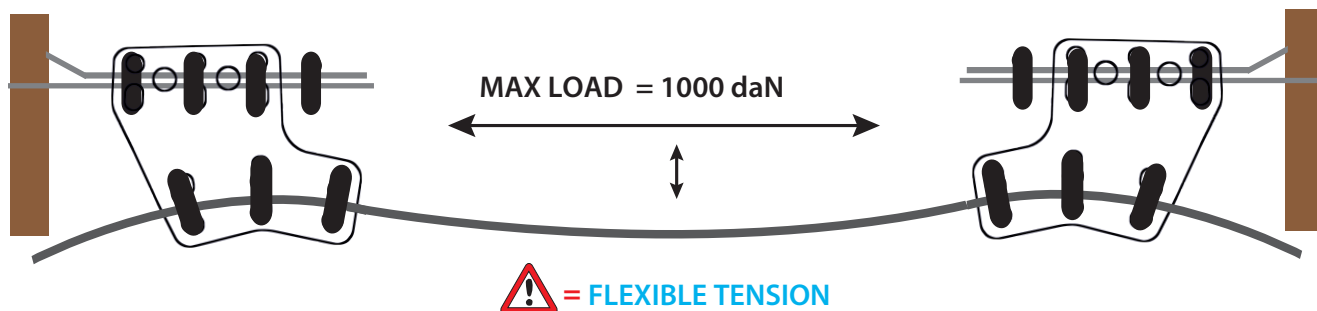


Operation 6

• JUNCTION

STANDARDS OF ASSEMBLY



EN 15567-1
EN 13411-1/7
STANDARDS - ACCT

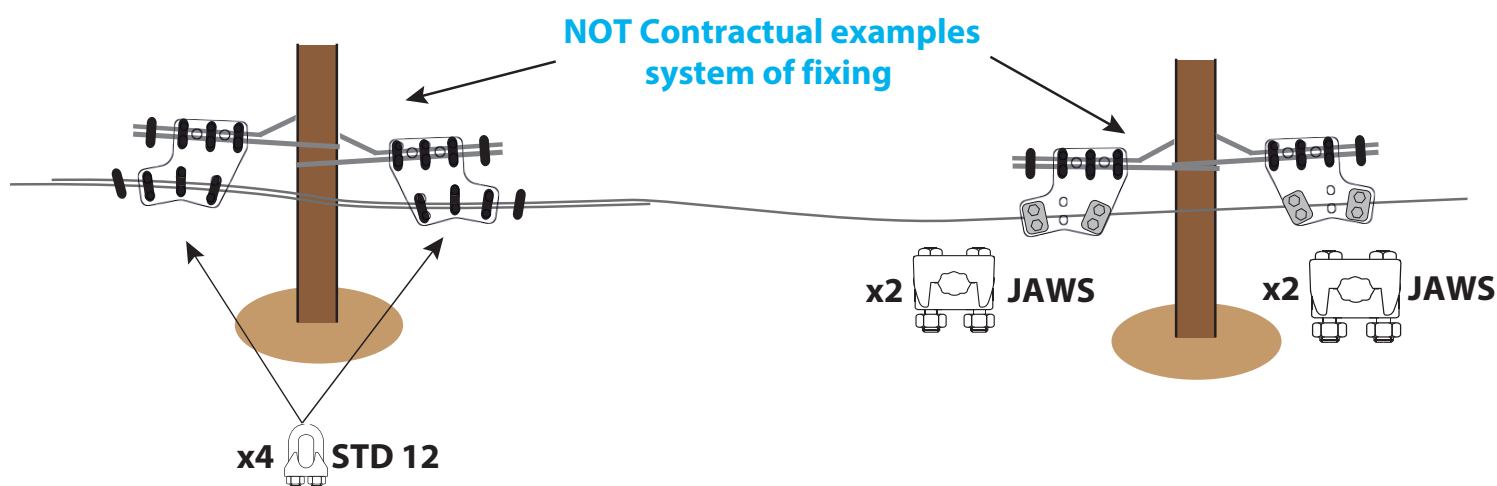

Operation 7

• Assembly for rolling games (NOT Contractual) Examples

