

15mm hole



# LYON

USER INSTRUCTIONS

## Rope lanyard

### Certification

CE 0598

EN 354:2010

### Approved body

EU Type-examination for Regulation 2016/425 by:  
Notified Body No. 2777

SATRA Technology Europe Ltd.

Bracetown Business Park, Clonee,  
Dublin, D15 YN2P, Ireland.

**This information to be read and kept in conjunction with the Lyon General User Instructions.**

**Lanyard may be supplied with fitted connectors – if so, read and keep connector user instructions.**

### Use

This lanyard is a flexible connecting element for use in a work at height system (work restraint, work positioning or fall arrest).



Do not use this lanyard as an anchor.

If there is any possibility of a fall, this lanyard **MUST** be used with an energy absorber conforming to EN 355 – see the section titled “Fall arrest”.

The lanyard may be used in conjunction with compatible items of personal fall protection equipment of suitable specification, with due consideration to the limitations of each individual piece of equipment in the safety chain. Only locking connectors conforming to EN 362 or EN 12275 may be used.

For work at height, the harness must conform to EN 361 if used for fall arrest, or EN 358 or EN 813 for work positioning; all connectors must conform to EN 362 and anchors to EN 795.

Attach one eye to a designated attachment point on the user’s harness, and the other eye to a suitable anchor point. Connections must be made with suitable connectors, and all connectors must be locked.

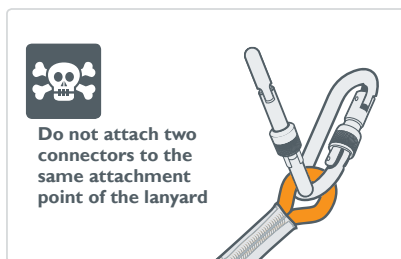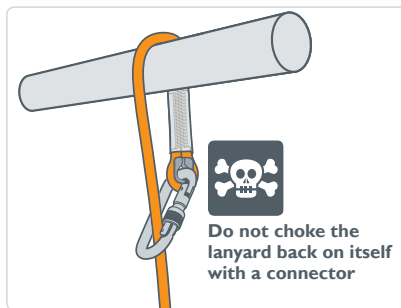

It is essential to regularly check fastening and adjustment elements during use.

Appropriate precautions should be taken if this lanyard is used over an edge, or it is possible that it could be loaded over an edge. Beware of pendulum falls.

The user should minimise the slack in the system before approaching a fall hazard. Adjustment should not take place where a fall could occur.


Performance and useable life will be reduced by ultraviolet radiation (UV), extreme temperatures, chemical contamination, sharp edges, cuts, abrasion (list not exhaustive).

This product is Personal Protective Equipment for one user only and should be a personal issue item. Please note it is **NOT** lifting equipment.

### Fall arrest

It is a requirement of EN 354 that if a lanyard is used for fall arrest, it **MUST** be used with an energy absorber conforming to EN 355, and the total length of the assembly including connectors should not exceed 2 metres. It is forbidden to extend the lanyard between the lanyard end connector and the anchor point.

Two separate lanyards each with an energy absorber must not be used side by side (in parallel) as the impact force may exceed the maximum force permitted under EN 355.

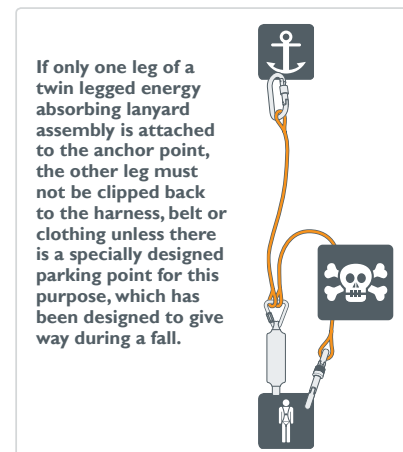

On each occasion of use, ensure there is enough space below the user to avoid an impact in the event of a fall – see user instructions for the energy absorber.

### Inspection

Lanyards should be subject to:

- Pre-use checks
- Thorough inspections
- Interim inspections (as appropriate)

Before each use, check the lanyard for wear or damage. Check the thimble for cracks. If the thimble is cracked and there is no sign of related damage (evidence of overloading which may have caused the cracking, or damage to the rope as a result of the cracked thimble), the thimble should be removed to prevent possible damage to the rope. Then the lanyard may continue to be used subject to passing the other checks. Check for cuts, burn marks, abrasion, bulging of the core through the sheath, bulges and flat sections in the rope. Check the load bearing stitching for abrasion or distortion, and cut or loose threads. Check both rope and stitching for discoloration, which could be the result of chemical or UV damage.

The checks should be undertaken in good light. Any item showing any defect should be withdrawn from service immediately.

Any connectors fitted to the lanyard should be inspected in accordance with the instructions for the specific connector.

### Chemicals

Avoid all contact with chemical reagents that could affect the performance of the lanyard, e.g acids, caustic substances and oxidising agents. Discard this product immediately if contamination is even suspected to have occurred.

### Materials

The rope and thread used in this lanyard is polyamide (Nylon). The heatshrink cover over the stitching is polyolefin.

The thimbles are plastic.

### Obsolescence

The maximum lifetime of this lanyard is ten years from date of manufacture.




**Document continues overleaf**

Web: Lyon.co.uk  
 Email: info@lyon.co.uk  
 Tel: +44 (0) 15396 24040  
 CA10 3SS,  
 Cumbria, United Kingdom,  
 Penrith,  
 Old Tebay,  
 Units 3-7, Tebay Business Park,  
 Lyon Equipment Ltd.



lyon.co.uk/user-instructions

For more detailed user information and to download a PDF copy of these instructions and a Declaration of Conformity follow the link above or scan the QR code with your smart phone





**Marking**

	Manufacturer's logo
LLRXXX	Product code, where XXX is the length in cm
idN	Individual serial number will be in the format YYDDD 12345. The first two digits give the year of manufacture, the next three digits the day of the year from 001 to 365 and the five digits after is the number in the series
CE 0598	CE mark and notified body number
EN 354:2010	Standard to which this item conforms
XXcm	Lanyard length in centimetres

Marking, on the heatshrink cover over the stitching, can be made with an indelible marker pen; alternatively, compatible rope marking tape may be applied to the rope next to the heatshrink.

*End of document*





## General user instructions



[lyon.co.uk/user-instructions](http://lyon.co.uk/user-instructions)

For more detailed user information and to download a PDF copy of these instructions and a Declaration of Conformity follow the link above or scan the QR code with your smart phone

Lyon Equipment Ltd.,  
Units 3-7, Tebay Business Park,  
Old Tebay,  
Penrith,  
Cumbria, United Kingdom,  
CA10 3SS.  
Tel: +44 (0) 15396 24040  
Email: [info@lyon.co.uk](mailto:info@lyon.co.uk)  
Web: [lyon.co.uk](http://lyon.co.uk)

### Notified body controlling manufacture (where applicable)

Where items of Personal Protective Equipment require an EU type examination in accordance with Personal Protective Equipment (EU) Regulation 2016/425, the body controlling the manufacture is: Notified body No. 0598  
SGS Fimko Oy,  
P.O. Box 30 (Särkiniementie 3),  
00211 HELSINKI, Finland.

### WARNING

Make sure that you have read and understood these instructions before using this equipment. These user instructions are to be read and kept along with any other user information provided.

Activities at height are hazardous and may lead to injury or death. It is the user's responsibility, at all times, to ensure that they understand the correct use of any equipment supplied by or through Lyon Equipment, use it only for the purposes for which it is designed, and practice proper safety procedures including having a rescue plan in case of emergency.

This product must not be used outside its limitations, or for any purpose other than those described in the user instructions. Misuses forbidden in these instructions are examples only; many other misuses may exist which could lead to injury or death.

Do not use combinations of items of equipment in which the safe function of any one item is affected or interferes with the safe function of another.

Please note, the information in these user instructions is not exhaustive, and is not a substitute for comprehensive instruction and training by a competent person.

Lyon Equipment is not responsible for any consequences, whether direct, indirect or accidental, resulting from the use of its products.

If you are unsure about the correct use of this product, please contact us.

### Who can use this equipment

This equipment should only be used by trained, competent and responsible persons, or the user should be under the direct supervision of a trained, competent and responsible person.

Activities at height should not be undertaken by persons affected by alcohol or drug dependence, diabetes, epilepsy, fits, blackouts, fear of heights, vertigo / dizziness / difficulty with balance, heart disease / chest pain, high or low blood pressure, impaired limb function, obesity, psychiatric illness, musculoskeletal issues, e.g. a bad back.

### General instructions for use

Equipment must be checked before each use, to ensure it is serviceable and operates correctly. Checks should also be carried out during use. In addition, a thorough inspection by a competent inspector should be carried out in strict accordance with these user instructions, and a record kept of these inspections.

This product may be used with any compatible item of equipment, keeping in mind the limitations of each item in the safety chain. It should be noted that a full body harness is the only type of harness which may be used in a fall arrest system.

The anchor device or anchor point is of primary importance and should be unquestionably reliable. It should be strong enough to withstand the foreseeable maximum load that could be applied e.g. in the event of a fall.

When selecting an anchor, the anticipated directions of loading and potential loads should be taken into account.

Anchors should be selected and positioned to allow work to be carried out in such a way as to minimise the potential for a fall and potential fall distance, for example by keeping the anchor point / device above the user.

Anchors should not have sharp or rough edges which could damage equipment (use edge protection if necessary).

On each occasion of use, verify the free space required beneath the user in order to avoid an impact. Always try to place protection so that any fall will be stopped before the user hits the ground or any other obstruction. Remember to allow for rope stretch and slippage in the belay device or rope ascender / descender. In a fall arrest situation, the user must be protected from dynamic forces of greater than 6 kN in the event of a fall, e.g. by use of a fall arrest system incorporating an EN 355 energy absorber.

### Maintaining your equipment

Wash in clean water not exceeding 30°C with pure soap and rinse in clean cold water. Do not use chemical products, solvents or detergents – these should be regarded as harmful.

Due to the difficulties in effectively disinfecting equipment, we recommend that any contaminated equipment should be withdrawn from use and disposed of in a suitable manner.

Equipment must be clean and dry before storing. Always allow to dry naturally, away from direct heat. Equipment should be stored in a cool, dry, well-ventilated area, away from excessive heat, high humidity, sharp edges, corrosives, sunlight or other sources of ultraviolet light (UV) and other possible causes of damage.

During transport, this product should be protected from abrasion, mechanical damage, chemical contamination, UV and heat.

### Textiles

Always keep textile items at temperatures between -30°C and +50°C.

### Metal items

Always keep metal items at temperatures between -20°C and +60°C.

No alterations, additions or repairs may be made to this product without the manufacturer's prior written consent; if done, the repair must be carried out by a competent person for repair authorised by Lyon Equipment to make the repair; and in accordance with specified procedures.

These instructions must be strictly adhered to.

### Inspection

A thorough inspection should be carried out at least every 6 months by a competent inspector in accordance with these user instructions. A record of these checks should be kept with the product along with these user instructions. In addition, interim inspections should be carried out where products are used intensively, or in particularly harsh environments where damage is more likely to occur, or where legislation or the type of equipment make it necessary.

Pre-use and thorough inspections are essential because the user's level of protection depends on the continuing correct performance of this product.

PPE (Personal Protective Equipment) inspection training is available from Lyon Equipment.

### Document continues overleaf

**Lifetime, and when to withdraw your equipment from use**

Withdraw your equipment from use if any one of the following applies:

- It shows sign of wear and tear / damage that may affect performance
- Markings on the product are no longer legible
- You suspect it may have been exposed to chemical contamination or extreme temperatures
- It fails a periodic examination
- It has been used to arrest a fall or has been excessively loaded
- It is more than 10 years after the date of manufacture (textile items or items with textile components). Metal items have a potentially indefinite lifespan if stored correctly.
- If you have any reason to doubt that it is safe to use.

It is the responsibility of the competent inspector to decide whether the equipment should be put back into use, or permanently withdrawn from use. Equipment permanently withdrawn from use must be destroyed, and should be recycled where facilities exist.

Certain environmental elements will considerably accelerate wear: salt, sand, dust, snow, ice, moisture, chemicals, sunlight (UV radiation) – list not exhaustive.

Warning: the safe working life of this product may be as short as its first use in extreme circumstances.

If in doubt, do not hesitate to scrap this product.

**Guarantee**

In the event of any defect in materials or workmanship please return the product to the dealer, distributor or manufacturer within 3 years of purchase for inspection. We will replace or repair as required. This guarantee does not cover normal wear and tear or accidental damage.

**Note to resellers**

If the product is re-sold outside the UK and Eire, but within the EU, the reseller is responsible for providing instructions for use, maintenance, periodic examination and for repair in the language of the country in which the product is to be used.










If you require the Intrastat commodity code / customs tariff code or NATO stock number (where applicable) for this product, please contact us via [lyon.co.uk](http://lyon.co.uk)

**Inspection records**

A record must be kept for each component, subsystem and system, including name and contact details of the manufacturer or supplier, product description, serial number, year of manufacture, date of purchase, date of first use, any other relevant information, and history of periodic examinations and repairs, including dates and details of inspections and repairs, the name and signature of the competent inspector and the next due date for inspection. An example of a suitable equipment record is shown on this user instruction and can also be downloaded at [lyon.co.uk](http://lyon.co.uk)

Local jurisdiction may dictate that extra information be recorded in the inspection record – check your country’s legal requirements. Some products may have features which need special monitoring during periodic inspections, e.g wear indicators, in which case this information should also be recorded on the inspection record.

**Explanation of symbols**

	<b>Refer to user instructions</b>
	<b>Permitted use</b>
	<b>Caution</b>
	<b>Danger of death</b>
	<b>Telephone number</b>
	<b>Anchor point</b>
	<b>Rope diameter</b>
	<b>Cable</b>
	<b>SWL (Safe Working Load)</b>

Lyon Product Inspection Record																												
Product code	Product description		Year of manufacture		Purchase date		Certificate of conformity number																					
	Length if applicable	Individual serial number	Date of first use		Other relevant information																							
<b>Manufacturer</b> Lyon Equipment Ltd.	<b>Address</b> Units 3-7, Tebey Business Park, Old Tebey, Penrith, CA10 3SS, UK		Tel: +44 (0)15396 24040 Fax: +44 (0)15396 26330 info@lyon.co.uk lyon.co.uk		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">Record of inspection and repair</th> </tr> <tr> <th style="width: 80%;">Date</th> <th style="width: 20%;">Next due date</th> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>		Record of inspection and repair		Date	Next due date																		
Record of inspection and repair																												
Date	Next due date																											
Comments		Name and signature of competent inspector																										

All user instructions supplied with this product must be kept as part of the product inspection record