

15mm  
hole



LYON

USER INSTRUCTIONS

## 7mm stainless steel wire lanyard



Web: lyon.co.uk  
Email: info@lyon.co.uk  
Tel: +44 (0) 15396 24040  
CA10 3SS,  
Cumbria, United Kingdom,  
Penrith,  
Old Tebay,  
Units 3-7, Tebay Business Park,  
Lyon Equipment Ltd.

NOT



lyon.co.uk/user-instructions

**Certification**  
CE 0598  
EN 354:2010

**Approved body**  
EU Type-examination for Regulation 2016/425 by:  
Notified Body No. 2777  
SATRA Technology Europe Ltd.  
Bracetown Business Park, Clonee,  
Dublin, D15 YN2P, Ireland.

*This information to be read and kept in  
conjunction with the Lyon General User  
Instructions.*

*Lanyard may be supplied with fitted connectors  
– if so, read and keep connector user  
instructions.*

### Use

This lanyard is a flexible connecting element for use in a work at height system (work restraint, work positioning or fall arrest).

Do not use this lanyard as an anchor.

If there is any possibility of a fall, this lanyard **MUST** be used with an energy absorber conforming to EN 355 – see the section titled “Fall arrest”.


The lanyard may be used in conjunction with compatible items of personal fall protection equipment of suitable specification, with due consideration to the limitations of each individual piece of equipment in the safety chain. Only locking connectors conforming to EN 362 or EN 12275 may be used.

For work at height, the harness must conform to EN 361 if used for fall arrest, or EN 358 or EN 813 for work positioning; all connectors must conform to EN 362 and anchors to EN 795.

Attach one eye to a designated attachment point on the user's harness, and the other eye to a suitable anchor point. Connections must be made with suitable connectors, and all connectors must be locked.



**Do not choke the  
lanyard back  
on itself with a  
connector**



Do not attach two connectors to the same attachment point of the lanyard.

It is essential to regularly check fastening and adjustment elements during use.

Appropriate precautions should be taken if this lanyard is used over an edge, or it is possible that it could be loaded over an edge. Beware of pendulum falls.

The user should minimise the slack in the system before approaching a fall hazard. Adjustment should not take place where a fall could occur.

Performance and useable life will be reduced by larks footing / choking around anchor points, storage and ageing due to use, etc. (list not exhaustive).


This product is Personal Protective Equipment for one user only and should be a personal issue item. Please note it is **NOT** lifting equipment.

### Fall arrest

It is a requirement of EN 354 that if a lanyard is used for fall arrest, it **MUST** be used with an energy absorber conforming to EN 355, and the total length of the assembly including connectors should not exceed 2 metres. It is forbidden to extend the lanyard between the lanyard end connector and the anchor point.


Two separate lanyards each with an energy absorber must not be used side by side (in parallel) as the impact force may exceed the maximum force permitted under EN 355.

**If only one leg of a  
twin legged energy  
absorbing lanyard  
assembly is attached  
to the anchor point,  
the other leg must  
not be clipped back  
to the harness, belt or  
clothing unless there  
is a specially designed  
parking point for this  
purpose, which has  
been designed to give  
way during a fall.**

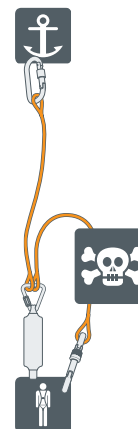

On each occasion of use, ensure there is enough space below the user to avoid an impact in the event of a fall – see user instructions for the energy absorber.

### Inspection

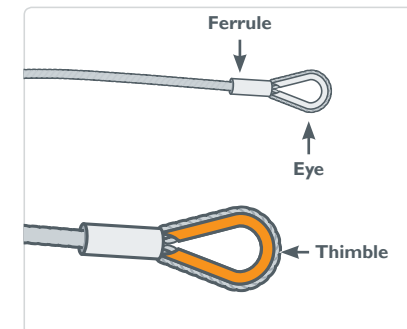

Lanyards should be subject to:

- Pre-use checks
- Thorough inspections
- Interim inspections (as appropriate)

Before each use, the whole lanyard should be checked by visual inspection of the wire and the ferrules for any signs of corrosion, permanent deformation or other damage. There should be no broken strands or kinks in the wire. The ferrules should be tight with no movement of the wire within the ferrule, and there should be no cracks in the ferrules. There should be no deformation of the eyes or thimbles.

The checks should be undertaken in good light. Any item showing any defect should be withdrawn from service immediately.

Any connectors fitted to the lanyard should be inspected in accordance with the instructions for the specific connector.

### Chemicals

Avoid all contact with chemical reagents that could affect the performance of the lanyard, e.g. acids, caustic substances and oxidising agents. Discard this product immediately if contamination is even suspected to have occurred.

**Document continues overleaf**

Materials

The wire used in this lanyard is stainless steel, with copper ferrules and stainless steel thimbles.

Obsolescence

The lifetime of this lanyard is potentially indefinite, subject to inspection.

Marking

	Manufacturer's logo
LLWXXX	Product code, where XXX is the length in cm
idN	Individual serial number will be in the format YYDDD 12345. The first two digits give the year of manufacture, the next three digits the day of the year from 001 to 365 and the five digits after is the number in the series
CE 0598	CE mark and notified body number
EN 354:2010	Standard to which this item conforms
XXcm	Lanyard length in centimetres

End of document



## General user instructions



LYON Equipment Ltd.,  
Units 3-7, Tebay Business Park,  
Old Tebay,  
Penrith,  
Cumbria, United Kingdom,  
CA10 3SS.  
Tel: +44 (0) 15396 24040  
Email: info@lyon.co.uk  
Web: lyon.co.uk



lyon.co.uk/user-instructions

### Notified body controlling manufacture (where applicable)

Where items of Personal Protective Equipment require an EU type examination in accordance with Personal Protective Equipment (EU) Regulation 2016/425, the body controlling the manufacture is: Notified body No. 0598  
SGS Fimko Oy,  
P.O. Box 30 (Särkiniementie 3),  
00211 HELSINKI, Finland.

### WARNING

Make sure that you have read and understood these instructions before using this equipment. These user instructions are to be read and kept along with any other user information provided.

Activities at height are hazardous and may lead to injury or death. It is the user's responsibility, at all times, to ensure that they understand the correct use of any equipment supplied by or through Lyon Equipment, use it only for the purposes for which it is designed, and practice proper safety procedures including having a rescue plan in case of emergency.

This product must not be used outside its limitations, or for any purpose other than those described in the user instructions. Misuses forbidden in these instructions are examples only; many other misuses may exist which could lead to injury or death.

Do not use combinations of items of equipment in which the safe function of any one item is affected or interferes with the safe function of another.

Please note, the information in these user instructions is not exhaustive, and is not a substitute for comprehensive instruction and training by a competent person.

Lyon Equipment is not responsible for any consequences, whether direct, indirect or accidental, resulting from the use of its products.

If you are unsure about the correct use of this product, please contact us.

### Who can use this equipment

This equipment should only be used by trained, competent and responsible persons, or the user should be under the direct supervision of a trained, competent and responsible person.

Activities at height should not be undertaken by persons affected by alcohol or drug dependence, diabetes, epilepsy, fits, blackouts, fear of heights, vertigo / dizziness / difficulty with balance, heart disease / chest pain, high or low blood pressure, impaired limb function, obesity, psychiatric illness, musculoskeletal issues, e.g. a bad back.

### General instructions for use

Equipment must be checked before each use, to ensure it is serviceable and operates correctly. Checks should also be carried out during use. In addition, a thorough inspection by a competent inspector should be carried out in strict accordance with these user instructions, and a record kept of these inspections.

This product may be used with any compatible item of equipment, keeping in mind the limitations of each item in the safety chain. It should be noted that a full body harness is the only type of harness which may be used in a fall arrest system.

The anchor device or anchor point is of primary importance and should be unquestionably reliable. It should be strong enough to withstand the foreseeable maximum load that could be applied e.g. in the event of a fall.

When selecting an anchor, the anticipated directions of loading and potential loads should be taken into account.

Anchors should be selected and positioned to allow work to be carried out in such a way as to minimise the potential for a fall and potential fall distance, for example by keeping the anchor point / device above the user.

Anchors should not have sharp or rough edges which could damage equipment (use edge protection if necessary).

On each occasion of use, verify the free space required beneath the user in order to avoid an impact. Always try to place protection so that any fall will be stopped before the user hits the ground or any other obstruction. Remember to allow for rope stretch and slippage in the belay device or rope ascender / descender. In a fall arrest situation, the user must be protected from dynamic forces of greater than 6 kN in the event of a fall, e.g. by use of a fall arrest system incorporating an EN 355 energy absorber.

### Maintaining your equipment

Wash in clean water not exceeding 30°C with pure soap and rinse in clean cold water. Do not use chemical products, solvents or detergents – these should be regarded as harmful.

Due to the difficulties in effectively disinfecting equipment, we recommend that any contaminated equipment should be withdrawn from use and disposed of in a suitable manner.

Equipment must be clean and dry before storing. Always allow to dry naturally, away from direct heat. Equipment should be stored in a cool, dry, well-ventilated area, away from excessive heat, high humidity, sharp edges, corrosives, sunlight or other sources of ultraviolet light (UV) and other possible causes of damage.

During transport, this product should be protected from abrasion, mechanical damage, chemical contamination, UV and heat.

### Textiles

Always keep textile items at temperatures between -30°C and +50°C.

### Metal items

Always keep metal items at temperatures between -20°C and +60°C.

No alterations, additions or repairs may be made to this product without the manufacturer's prior written consent; if done, the repair must be carried out by a competent person for repair authorised by Lyon Equipment to make the repair; and in accordance with specified procedures.

These instructions must be strictly adhered to.

### Inspection

A thorough inspection should be carried out at least every 6 months by a competent inspector in accordance with these user instructions. A record of these checks should be kept with the product along with these user instructions. In addition, interim inspections should be carried out where products are used intensively, or in particularly harsh environments where damage is more likely to occur, or where legislation or the type of equipment make it necessary.

Pre-use and thorough inspections are essential because the user's level of protection depends on the continuing correct performance of this product.

PPE (Personal Protective Equipment) inspection training is available from Lyon Equipment.

*Document continues overleaf*

