

### Miller 8327 Retractable Web Lanyard

**Material**


Housing: Stamped steel w/thermoplastic cover  
 Connector: Aluminum  
 Lifeline: 1 3/4 in. polyester  
 Thread: Polyester  
 Carabiner: Zinc plated steel (if applicable)  
 Swivel: Heat treated forged steel

**Technical**

Max. Working Load: 310 lbs. (141 kg)  
 Working Length: 6 ft. (1.8 m)  
 7 ft. (2.1 m)  
 8 ft. (2.4 m)  
 10 ft. (3.0 m)  
 Max. Arrest Distance: 39 in. (1.0 m)  
 Max. Peak Arrest Force: 1,800 lbf. (8kN)  
 Unit Minimum Ultimate Strength: 3,000 lbf. (13 kN)

**Certification**

Please refer to table on following page.

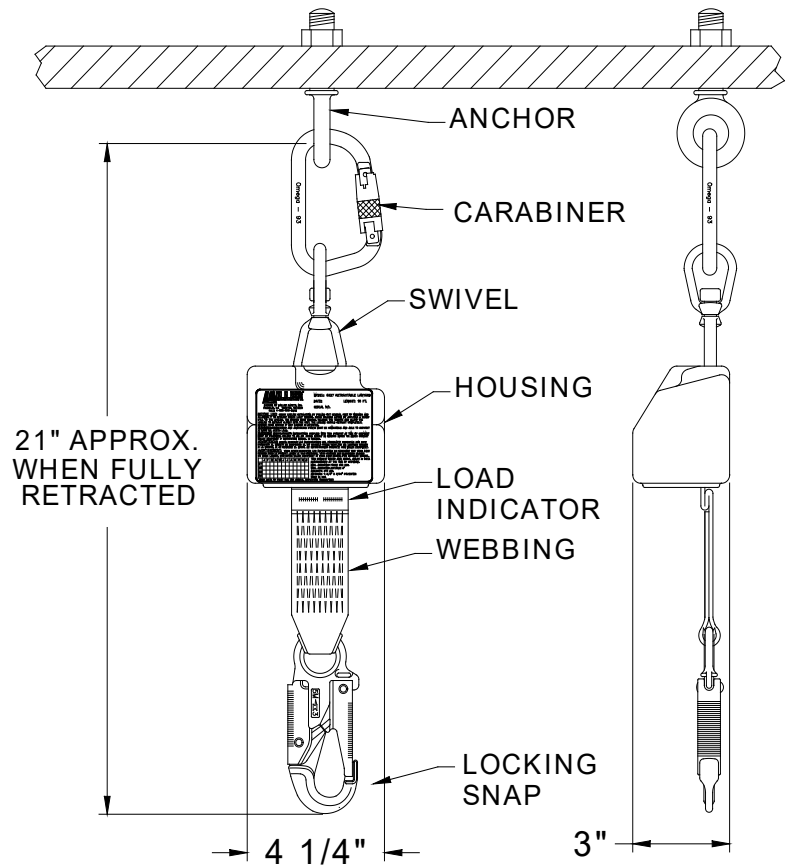

# TECHNICAL DATA

SP102 Rev C 5-17

MODEL NUMBER	LIFELINE LENGTH	UNIT CONNECTOR	LANYARD END CONNECTOR
OSHA 1926.502 and 1910.66 and CSA Z259.2.2-98 Type 1. Connecting components meet or exceed ANSI Z359.12-2009 and CSA Z259.12-11 for requirements for 3,600 lb. gate strength.			
8327-Z7/6FTYL	6 ft. (1.8 m)	Swivel Shackle and Steel Twist-lock Carabiner	Aluminum Snap Hook
8327-Z7/7FTYL	7 ft. (2.1 m)	Swivel Shackle and Steel Twist-lock Carabiner	Aluminum Snap Hook
8327-Z7/8FTYL	8 ft. (2.4 m)	Swivel Shackle and Steel Twist-lock Carabiner	Aluminum Snap Hook
8327-Z7/10FTYL	10 ft. (3 m)	Swivel Shackle and Steel Twist-lock Carabiner	Aluminum Snap Hook
8327A-Z7/10FTYL	10 ft. (3 m)	Swivel Shackel	Aluminum Snap Hook
AD6902-Z7/7FTYL	7 ft. (2.1 m)	Aluminum Twist-Lock Carabiner	Aluminum Twist-Lock Carabiner
AD6902-Z7/8FTYL	8 ft. (2.4 m)	Aluminum Twist-Lock Carabiner	Aluminum Twist-Lock Carabiner
OSHA 1926.502 and 1910.66			
8327/6FTYL	6 ft. (1.8 m)	Swivel Shackle and Steel Twist-Lock Carabiner	Aluminum Snap Hook
8327/7FTYL	7 ft. (2.1 m)	Swivel Shackle and Steel Twist-Lock Carabiner	Aluminum Snap Hook
8327/8FTYL	8 ft. (2.4 m)	Swivel Shackle and Steel Twist-Lock Carabiner	Aluminum Snap Hook
8327/10FTYL	10 ft. (3 m)	Swivel Shackle and Steel Twist-Lock Carabiner	Aluminum Snap Hook
8327A/7FTYL	7 ft. (2.1 m)	Swivel Shackle	Aluminum Snap Hook
8327A/8FTYL	8 ft. (2.4 m)	Swivel Shackle	Aluminum Snap Hook
8327A/10FTYL	10 ft. (3 m)	Swivel Shackle	Aluminum Snap Hook
832SW/6FTYL	6 ft. (1.8 m)	N/A	Aluminum Twist-Lock Carabiner
832SW/8FTYL	8 ft. (2.4 m)	N/A	Aluminum Twist-Lock Carabiner
832SW/10FTYL	10 ft. (3 m)	N/A	Aluminum Twist-Lock Carabiner
AD6902/6FTYL	6 ft. (1.8 m)	Aluminum Twist-Lock Carabiner	Aluminum Twist-Lock Carabiner
AD6902/7FTYL	7 ft. (2.1 m)	Aluminum Twist-Lock Carabiner	Aluminum Twist-Lock Carabiner
AD6902/8FTYL	8 ft. (2.4 m)	Aluminum Twist-Lock Carabiner	Aluminum Twist-Lock Carabiner

**Limitless Possibilities. Ask the Expert.**

Technical Service: 800.873.5242

www.millerfallprotection.com

**Honeywell Industrial Safety**

900 Douglas Pike  
Smithfield, RI 02917

**USA**


Phone: 800.430.5490

Fax: 800.322.1330

**Canada**

Phone: 888.212.7233

Fax: 888.667.8477

 This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.