

This swivel anchor may be used as a permanent or portable anchor. It is specifically designed for fall protection, work positioning, restraint, tie back anchoring, four-man life line systems, and more. Drill a hole in the concrete, blow out the dust, and insert the swivel. This anchor can be removed and used again. The concrete bolt is designed to be used in concrete.

Key Features:

Works in both shear and tensile loads • D-ring rotates 360 degrees • D-ring flips 180 degrees • Heavy gauge zinc plated, forged, heat treated alloy steel • One concrete bolt included

MBS: 44 kN (10000 lbf)

WLL: 9 kN (2000 lbf)


Weight: 1 lbs 12.8 oz (816 g)

HD26227



COMPLIANT

EN 795 ANSI Z359.1 (2007)

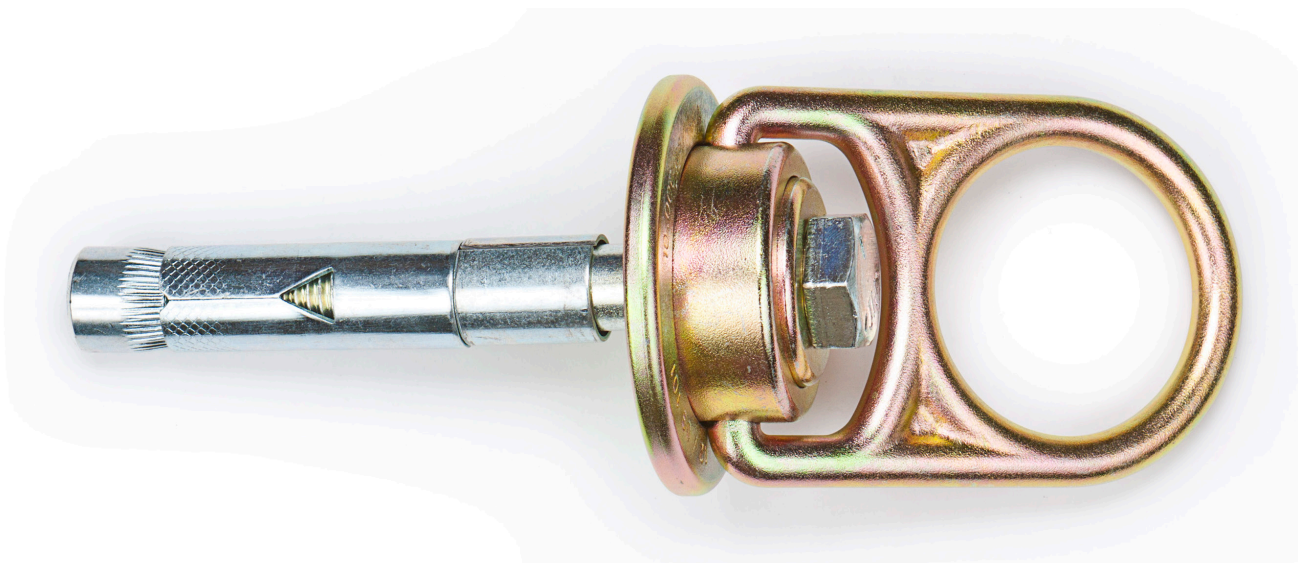

A large, empty rectangular box with a thin black border, intended for handwritten notes or a signature.

Pigeon Mountain Industries, Inc. | PO Box 803, LaFayette, GA 30278 | Fax: 706-764-1531 | Email: custserv@pmirope.com