

Made to exacting PMI standards, these new ropes satisfy the need for a softer hand and a bit more stretch than PMI's current low stretch ropes. Popular in rope access work around the globe, this style of rope meets all applicable standards including CI and CE. PMI is proud to introduce these new global ropes for work and rescue applications.


Key Features:

Nylon • CI, CE and EN Certified • Low stretch with a soft hand • Designed for use with bobbin/squeeze type descenders • Great choice for Rope Access and Fall Arrest applications.

10.5 mm (13/32")

*Weight: 65 g/m » MBS: 27 kN (6069 lbf) » Length: 200 m (656 ft) »
 Elongation (EN1891): 3.0% » Falls: 16 » Impact Force: 5.1 kN at 0.3 FF
 Knotability: 0.63 » Sheath Slippage: 0.8% » Shrinkage: 5.0%
 Sheath Content: 38.0% » Material: Nylon Sheath/Nylon Core*

White MR105WH200
 Green MR105GR200

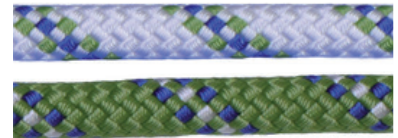


CERTIFIED EN 1891-A CE CI1801, Low Stretch

11 mm (7/16")

*Weight: 73 g/m » MBS: 30 kN (6740 lbf) » Length: 200 m (656 ft) »
 Elongation (EN1891): 2.8% » » Falls: 20 » Impact Force: 5.1 kN at 0.3 FF
 Knotability: 0.74 » Sheath Slippage: 0.8% » Shrinkage: 4.0% »
 Sheath Content: 36.0% » Material: Nylon Sheath/Nylon Core*

White MR110WH200
 Green MR110GR200

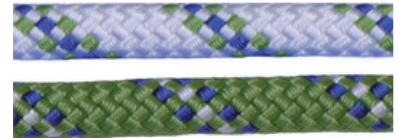

CERTIFIED EN 1891-A CE CI1801, Low Stretch

A large, empty rectangular box with a thin black border, intended for handwritten notes or a signature.

Pigeon Mountain Industries, Inc. | PO Box 803, LaFayette, GA 30278 | Fax: 706-764-1531 | Email: custserv@pmirope.com