



STATIC R44 NFPA 10.5

Excellent static rope for rescue and everyday work at height.

DESCRIPTION

Type A rope - low stretch kern-mantle rope designed for general use for rope access (including work positioning and restraint), rescue and caving. Intended for manipulation with the objects, rescue and rope access methods for work at height.

Pack:
150, 200, 300 ft | 46, 61, 92 m

Coil:
330, 600, 660 ft | 100, 183, 200 m

COLORS

- R0430KK khaki
- R0430WR white
- R0430RR red
- R0430BB black



Meets requirements that the rescuers, firemen, specialists working at height and other professionals require when working every day.

Ultrasoundic ending.

Patented rope-braiding technology ROUTE 44.

KEY FEATURES

- large diameter for longer lifetime
- ROUTE 44 technology
- 4 color variants

STANDARDS

NFPA 1983 (2017)
CE 1019
EN 1891

FEATURES



10.5 mm



32 kN



72 g/m




unique number




warranty

MATERIALS



● 100 % PAD

TECHNICAL DATA

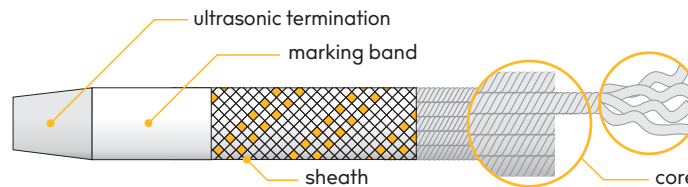

elongation at 1.35 kN (300 lbs)	= 3.5 %
elongation at 2.7 kN (600 lbs)	= 7.2 %
elongation at 4.4 kN (1000 lbs)	= 9.9 %

