

# ↑ ANTISHOCK I

Full body harness for rope access, work positioning and fall arrest. The ANTISHOCK I antistatic harness is the perfect solution for work at height in explosive atmospheres. It is particularly suitable for energetics, petrochemical and mining environments.

## DESCRIPTION

Name tag at clearly visible place.

Additional „A” marking of fall-arrest attachment points (according to EN 361).

Front lower attachment point for descender placement or work positioning.

Heavier items up to 35 kg can be attached to the webbing on the waist belt.

Identification and methodical label.

All metal parts are overmolded with colored plastic with an electrical puncture resistance of 10 kV and antistatic finishing.

2 side attachment points for work positioning.

Ergonomic braided gear loops with a bearing capacity 5 kg.

Additional loops on the leg loops and waist belt with a bearing capacity of 5 kg for better gear orientation.



Shoulder connection for confined space rescue.

Removable lanyard parking element.

Reflective straps on the shoulders for higher visibility.

Fall arrest indicator (back side).

Chest ascender smart fixation system (using an additional maillon), works best with CAM CLEAN.

Anatomic waist belt, leg loops and shoulder straps padding ensure enough comfort.

Double buckles in accordance with strict North American standards with zero slippage and minimum strength 17.8 kN.

## KEY FEATURES

- fall arrest indicator
- lanyard parking element
- all metal parts finished with plastic, an electrical puncture resistance of 10 kV and antistatic finishing

## STANDARDS




EN 358:2018  
EN 361:2002  
EN 813:2008  
EN 1497:2007

ANSI Z359.11-2014

NFPA 1983-2017 Edition

This harness meets the life safety harness requirements of NFPA 1983, standard on life safety rope and equipment for emergency services, 2017 edition; class III.

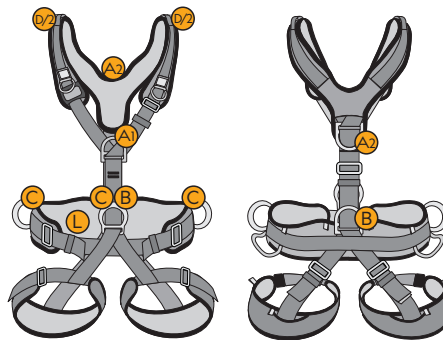

		NFPA class III life safety harness	EN standard
A1	Head up	16 kN	Fall arrest attachment element
	Head down	10 kN	10 kN EN 361:2002
A2	Head up	16 kN	Fall arrest attachment element
	Head down	10 kN	10 kN EN 361:2002
B	Head up	16 kN	rappel/positioning attachment element
C	Head up	13 kN	positioning only attachment
D	Head up	16 kN	shoulder attachment element

L label location maximum rated load 150kg

## MATERIALS



- 43 % zinc plated steel
- 34 % PAD
- 13 % PES
- 5 % EVA foam
- 5 % polyethylene

## FEATURES



M/L = 2 430 g




unique No.




3 YEARS guarantee

**TECHNICAL DATA**

1 – Frontal attachment element, 2 – Hip attachment element, 3 – Sternal attachment element, 4 – Dorsal attachment element, 5 – Shoulder attachment element, 6 - Loops to fasten chest ascender, 7 – Waist, rear attachment element, 8 – Buckle with plastic protection for adjusting waist belt strap, 9 – Buckle with plastic protection for adjusting leg loop strap, 10 – Buckle with plastic protection for adjusting shoulder strap, 11 – Buckle with plastic protection for adjusting dorsal element, 12 – Additional loop with a bearing capacity of 5 kg, 13 – Lanyard parking attachment, 14 – Fall arrest indicator, 15 – Shoulder strap, 16 – Waist belt strap, 17 – Leg loop strap, 18 – Connecting strap, 19 – Front waist belt part, 20 – Name tag, 21 – Elastic keeper for strap, 22 – Identification and methodical label, 23 – Gear loop, 24 – Waist belt padding, 25 – Leg loop padding, 26 – Shoulder padding, 27 – ANSI label

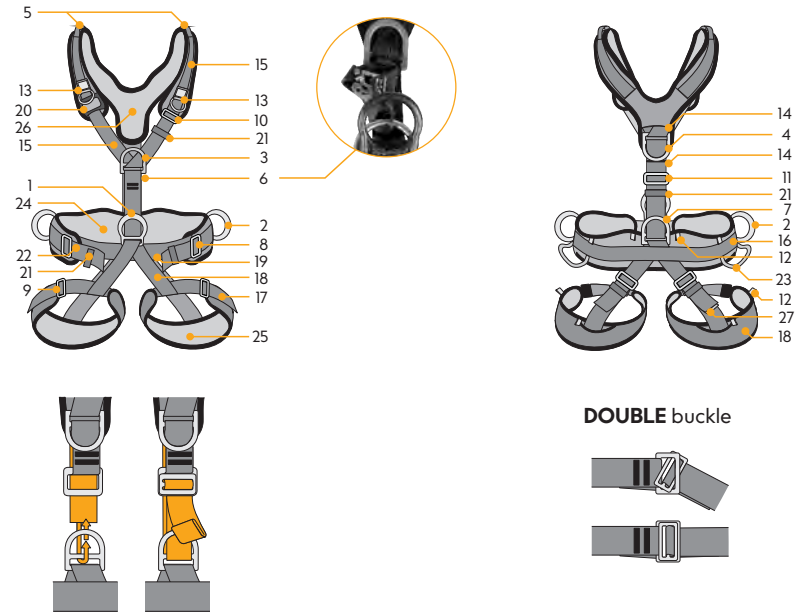

**FALL ARREST INDICATOR; LANYARD PARKING ATTACHMENT ELEMENT**

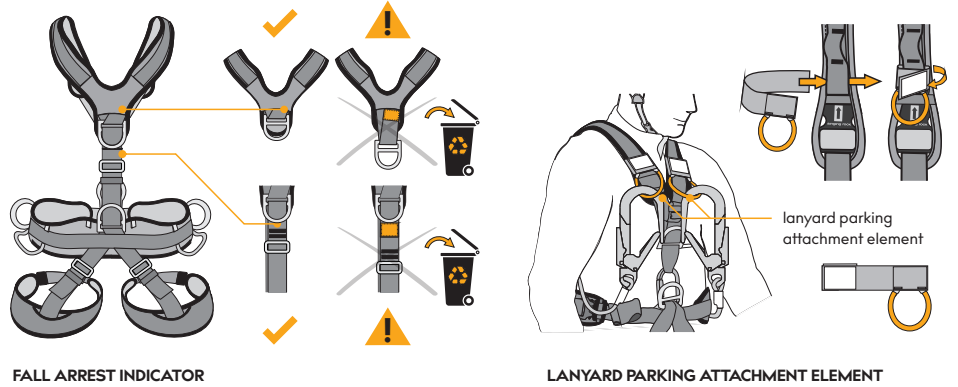

**SIZE CHART**



		S	M/L	XL
ANTISHOCK I m [g] M/L = 2 430	A [cm/in]	65-80 / 25-31	75-100 / 29-39	85-130 / 33-51
	B [cm/in]	45-60 / 18-24	50-75 / 19-29	50-75 / 19-29
	C [cm/ft]	150-170 / 4.92-5.57	160-180 / 5.25-5.9	175-205 / 5.74-6.73

**COMPARISON**

**ANTISHOCK I vs. EXPERT III**

- fall arrest indicator
- lanyard parking attachment element
- enlarged side and front positioning points allow easier clipping of the connector
- all metal parts are overmolded with colored plastic with an electrical puncture resistance of 10 kV and antistatic finishing



