


## Data sheet

# SKYSAFE PRO FLEX Y

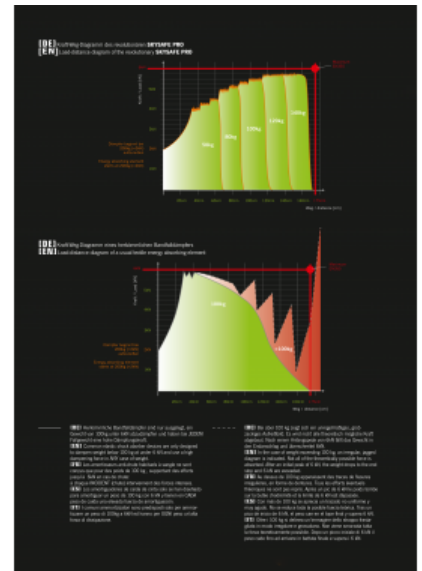

## GENERAL

Art. no.:	L-0563-1,8
EAN:	4030281180692
Standard:	EN 354:2010 EN 355:2002 EN 795:2012 RFU PPE-R/11.063 V1:2018 RFU PPE-R/11.074 V1:2018

E-class number:	40-02-01-04
Customs no.:	56090000

## Data sheet

# SKYSAFE PRO FLEX Y

### ONE4ALL - The SKYSAFE PRO

Revolutionary, new, patented energy absorber with the large weight range from 50 - 140kg (110 - 310 lbs.) that always withstands a maximum impact of less than 6 kN at a maximum absorber length of 1.75m (5.7 Feet).

The final impact resistance of 22 kN, also in the absorber, before AND after a fall is exceptional as well. SKYSAFE PRO furthermore meets the most relevant international standards in one SINGLE product.

**UNIQUE:** The built-in, adjustable RESCUE LOOPS! As a result, rescuers need not set up a rescue system and hereby save precious time in a rescue!

Available in four versions with different carabiner combinations:  
I-web, Y-web, I-web tie-back, Y-web tie-back.

### FEATURES

Fall indicator	
Breaking load, major axis:	
22,00 kN	
Hand-washing:	40 °C
Suitable for edges:	yes
Max. service life:	10 Years
Max. number of persons:	1
Rated load:	140 KG
Patent	
Rescue Loop:	yes
Temperature:	from 45 °C to -35 °C
Suspension element:	BAND
Area of application:	High Rack

## DIMENSIONS

Size: 1,8m

---

Weight: 2,64 kg

---

## HARDWARE

Carabiner on anchoring point side:

FS 92

---

Carabiner on belt side: STAK TRI

---

## MATERIAL

Material:

Polyester, Aluminium, Steel

---

Webbing material: Polyester

---