


Data sheet

SKYSAFE PRO TIE BACK

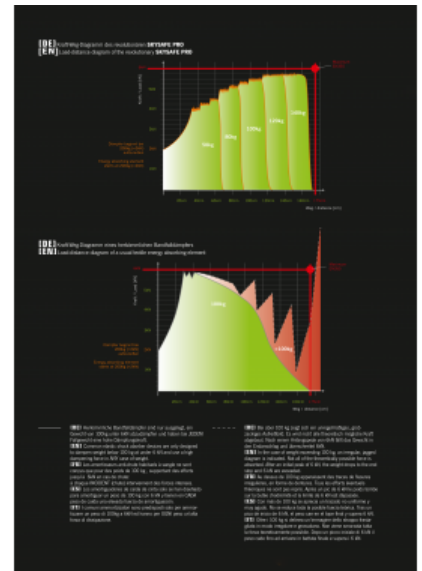

GENERAL

Art. no.:	L-0574-1,8
EAN:	4030281181552
Standard:	EN 354:2010 EN 355:2002 EN 795:2012 RFU PPE-R/11.063 V1:2018 RFU PPE-R/11.074 V1:2018

E-class number:	40-02-01-04
Customs no.:	56090000

Data sheet

SKYSAFE PRO TIE BACK

ONE4ALL – Revolutionary, patented energy absorber with the large weight range from 50kg to 140kg that always withstands a maximum impact of less than 6 kN at a maximum absorber length of 1.75m. The final impact resistance of 22 kN, also in the absorber, before AND after a fall is exceptional as well. SKYSAFE PRO also meets the most relevant international standards in a SINGLE product.

Available in four versions with different carabiner combinations: I-web, Y-web, I-web tie-back, Y-web tie-back.

GENERAL

Internat. standard:

ANSI Z359.13-6/12FTFF:2013, AS/NZS

1891.1:2007, MEETS CSA Z259.11-05-E6:2010

FEATURES

Fall indicator

Breaking load, major axis:

22,00 kN

Hand-washing: 40 °C

Suitable for edges: yes

Max. service life: 10 Years

Max. number of persons: 1

Rated load: 140 KG

Patent

Rescue Loop: yes

Temperature: from 45 °C to -35 °C

Suspension element: BAND

Area of application:

Construction / Roofer / Carpenter

DIMENSIONS

Size: 1,8m

Weight: 1,10 kg

HARDWARE

Carabiner on anchoring point side:

SNAP HOOK 23kN

Carabiner on belt side: KOBRA TRI

MATERIAL

Material:

Polyester, Polyamide, Steel

Webbing material: Polyester, Polyamide
