


Data sheet

**SKYSAFE PRO FLEX Y**

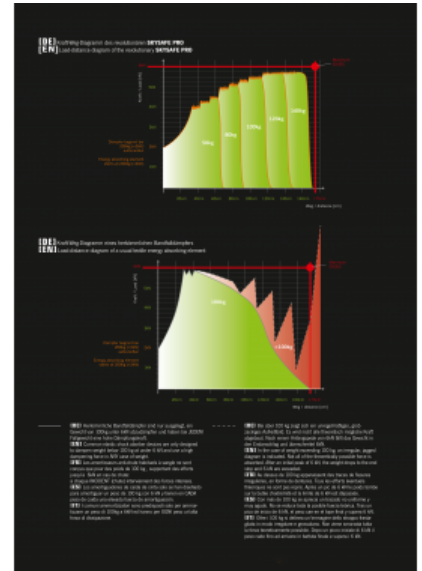

**GENERAL**

Art. no.:	L-0558-1,8
EAN:	4030281180647
Standard:	EN 354:2010 EN 355:2002 EN 795:2012 RFU PPE-R/11.063 V1:2018 RFU PPE-R/11.074 V1:2018

E-class number:	40-02-01-04
Customs no.:	56090000

## Data sheet

# SKYSAFE PRO FLEX Y

### ONE4ALL - The SKYSAFE PRO

Revolutionary, new, patented energy absorber with the large weight range from 50 - 140kg (110 - 310 lbs.) that always withstands a maximum impact of less than 6 kN at a maximum absorber length of 1.75m (5.7 Feet).

The final impact resistance of 22 kN, also in the absorber, before AND after a fall is exceptional as well. SKYSAFE PRO furthermore meets the most relevant international standards in one SINGLE product.

**UNIQUE:** The built-in, adjustable RESCUE LOOPS! As a result, rescuers need not set up a rescue system and hereby save precious time in a rescue!

Available in four versions with different carabiner combinations:  
I-web, Y-web, I-web tie-back, Y-web tie-back.

### GENERAL

Internat. standard:

ANSI Z359.13-6/12FTFF:2013, AS/NZS

1891.1:2007, MEETS CSA Z259.11-05-E6:2010

### FEATURES

Fall indicator

Breaking load, major axis:

22,00 kN

Hand-washing: 40 °C

Suitable for edges: yes

Max. service life: 10 Years

Max. number of persons: 1

Rated load: 140 KG

Patent

Rescue Loop: yes

Temperature: from 45 °C to -35 °C

Suspension element: BAND

Area of application:

Wind Energy / Offshore Industry

## DIMENSIONS

Size:	1,8m
Weight:	2,31 kg

## HARDWARE

Carabiner on anchoring point side:  
FS 64 ALU

Carabiner on belt side: KOBRA AL TRI

## MATERIAL

Material:	Polyester, Aluminium
Webbing material:	Polyester